



AS-C Auxiliary Switch Assembly

Auxiliary Switch Features

- Gasketed, weatherproof housing with screened vent in base of assembly
- Non-metallic housing for corrosion resistance and to reduce condensation effect
- Hole in base of housing for 1½" conduit
- Space heater
- Adjustable length drive lever
- Independently adjustable cams
- Infinitely adjustable cams, adjustable without the use of special tools
- Contacts can be set or wired as normally open or normally closed
- Snap-action contacts that are not dependent upon the rotation speed of the operating pipe
- Silver-nickel contacts for long life
- Available for 1½" or 2" IPS operating pipe
- Field wiring to microswitch terminals
- Two to twelve Form "C" contacts in assembly (available in sets of two)

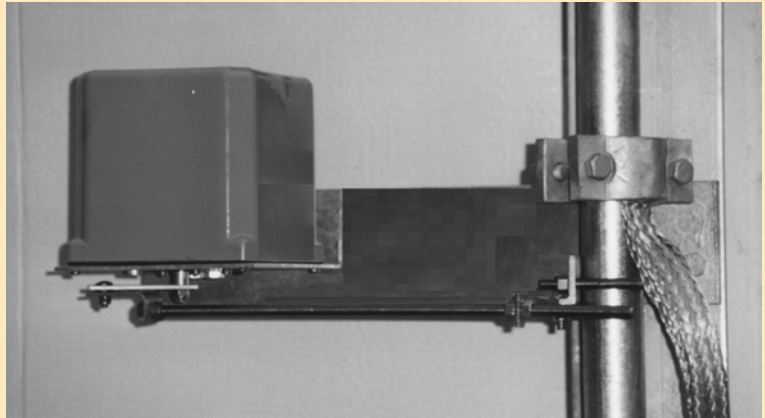

The Cleaveland/Price AS-C auxiliary switch assemblies are used for remote switch position indication and to electrically interlock the switch with associated devices such as circuit breakers and ground switches. The AS-C features a high AC interrupting rating. The auxiliary switches achieve high interrupting ratings through snap-action contacts.

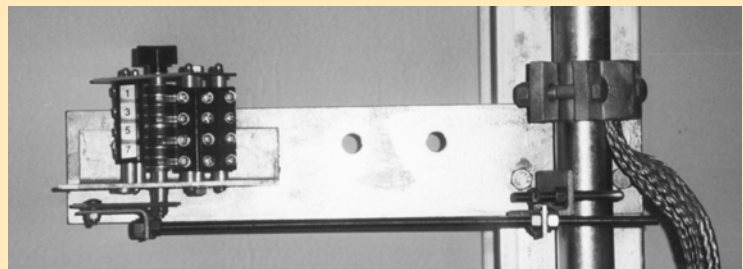

AS-C Ratings

- 20 A. continuous rating
- 15 A. interrupting rating at 125 to 480 volts AC
- 0.5 A. interrupting rating at 125 volts DC

 **Cleaveland/Price Inc.**

14000 Rt. 993, Trafford, PA 15085 (724) 864-4177


FAX (724) 864-9040

E-mail: sales@cleavelandprice.com


AS-T Auxiliary Switch Assembly

Auxiliary Switch Features

- Gasketed, weatherproof housing with screened vent in base of assembly
- Non-metallic housing for corrosion resistance and to reduce condensation effect
- Hole in base of housing for 1½" conduit
- Space heater
- Adjustable length drive lever
- Independently adjustable cams
- Infinitely adjustable cams, adjustable without the use of special tools
- Contacts can be set or wired as normally open or normally closed
- Snap-action contacts that are not dependent upon the rotation speed of the operating pipe
- Silver-nickel contacts for long life
- Available for 1½" or 2" IPS operating pipe
- Field wiring directly to switch terminal blocks
- Two to ten contacts in assembly (available in sets of two)

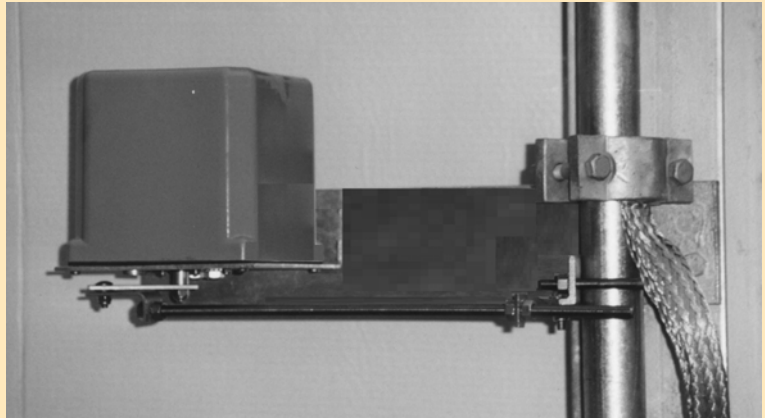

The Cleaveland/Price AS-T auxiliary switch assemblies are used for remote switch position indication and to electrically interlock the switch with associated devices such as circuit breakers and ground switches. The AS-T features a high DC interrupting rating. The auxiliary switches achieve high interrupting ratings through snap-action contacts.

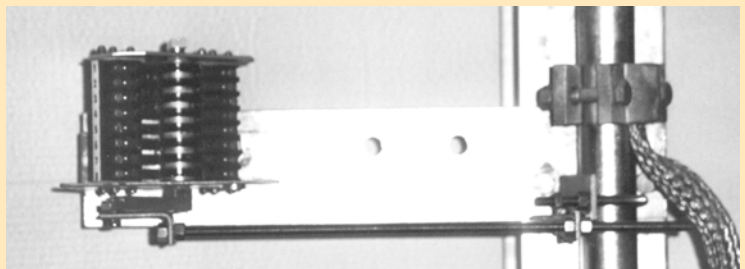

AS-T Ratings

- 20 A. continuous rating
- 20 A. interrupting rating at 125 volts AC
- 10 A. interrupting rating at 125 volts DC inductive

 **Cleaveland/Price Inc.**

14000 Rt. 993, Trafford, PA 15085 (724) 864-4177

FAX (724) 864-9040

E-mail: sales@cleavelandprice.com