


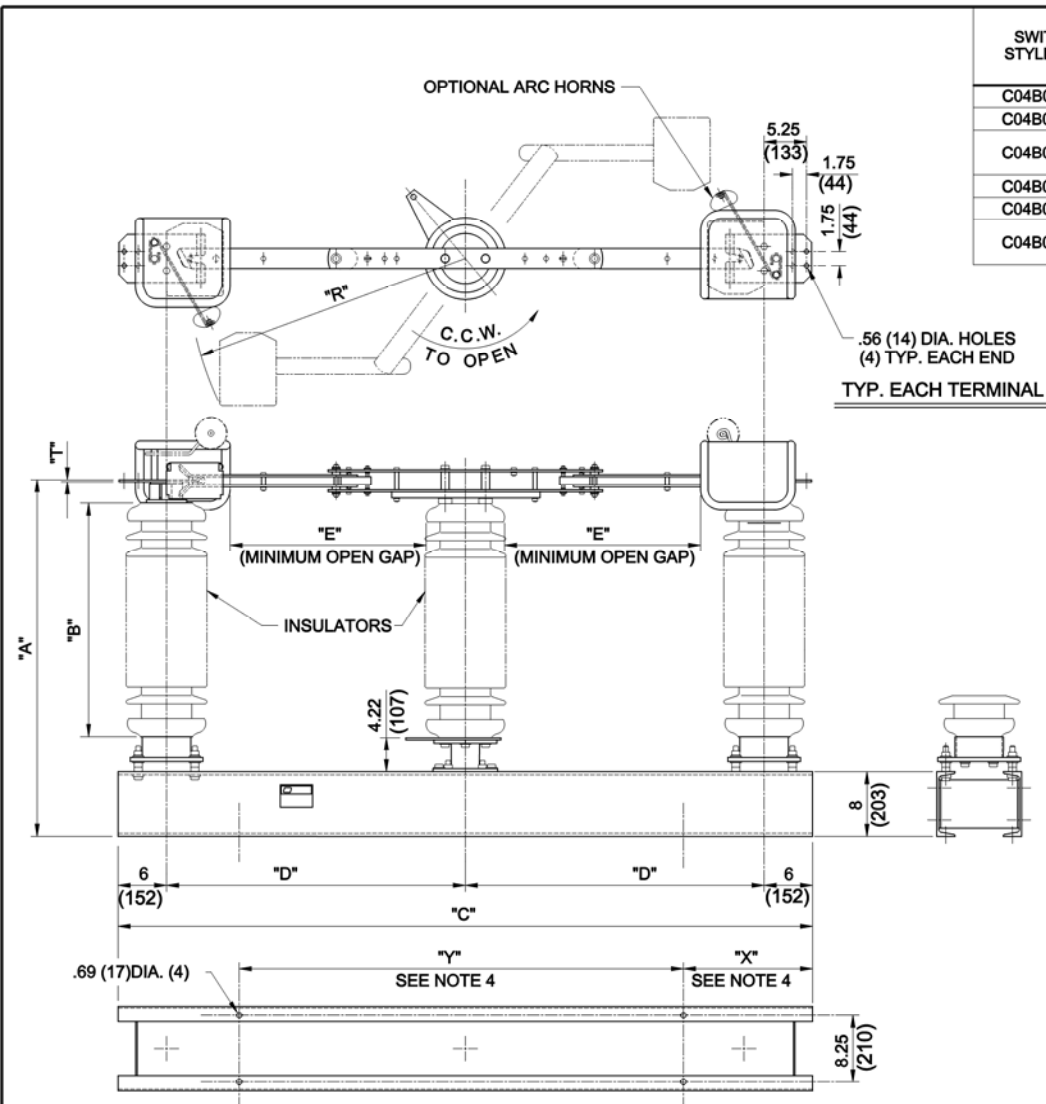

SWITCH STYLE NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN ITALICS							WEIGHT/POLE (INCL. INSUL.)	
	kV NOM	kV MAX	kV BIL	AMPS	kA MOM		"A"	"B"	"C"	"D"	"E"	"R"	"T"	LBS.	KG
C04B004G01	230	245	900	1200	61	304	95.22 (2419)	80	106	47	35	45.94 (1167)	.25 (6)	1404	[637]
C04B004G02				1600	70		95.85 (2435)	(2032)	(2692)	(1194)	(889)	(1167)	.50 (13)	1416	[642]
C04B004G03				2000	100		107.22 (2723)	92	114	51	39	49.88 (1267)	.25 (6)	1605	[728]
C04B004G04	230	245	1050	1200	61	312	107.85 (2739)	(2337)	(2896)	(1295)	(991)	(1267)	.50 (13)	1619	[735]
C04B004G05				1600	70										
C04B004G06				2000	100									1669	[757]

NOTES:

1. C.C.W. SWING TO OPEN SHOWN.
C.W. SWING TO OPEN (OPP. HAND).
2. COPPER TERMINAL PADS.
3. INSULATORS INVERTED FOR UNDERHUNG MOUNTING.
4. CUSTOMER TO SUPPLY "X" & "Y" DIMENSIONS.
5. ALL DIMENSIONS ARE IN INCHES.
6. DIMENSIONS IN () ARE IN MM .
7. WEIGHTS IN [] ARE IN KG .

ENGINEERING REF DWG. C04B002

REVISION	REV -D			CODE A00		DRAWN DP		CHECKED SF	DATE 06/24/1997	SWITCH STYLE REFERENCE NUMBER -		DWG NO.
REV A: UPDATE MAX kV LAB 9/22/04 REV B: ADD ARC HORN 10/1/04 REV C: UPDATE WEIGHTS JPB 04/21/2009 REV D: UPDATE "R" DIMS. & NOTE 1. RC 1-27-2012.												
Cleaveland/Price Inc. 14000 Route 993 : Trafford, PA 15085												
DB-C COPPER DOUBLE SIDE BREAK DISCONNECT SWITCH OUTLINE 230kV, 1200-2000A, & 5" B.C. INSULATORS												
												C04B004