


| | |
|---|---|
| kV NOM. | 345 |
| kV MAX. | 362 |
| kV BIL | 1300 |
| AMPS | 5000 |
| ASYM. kA | 160 |
| PEAK | 260 |
| SHORT TIME | 100 |
| WT./POLE | 2075 lbs. |

NOTES:
1. ALUMINUM TERMINAL PADS.
2. SILVER PLATED CONTACTS.
3. ALL COPPER PARTS ARE TIN PLATED ALL OVER.
4. HOT-DIP GALV. STEEL CHANNEL BASE.
5. ALL DIMENSIONS ARE IN INCHES.
6. C.C.W. SWING AS SHOWN.
   C.W. SWING OPPOSITE HAND.
7. CUSTOMER TO SUPPLY THE "X" & "Y" DIMENSIONS.

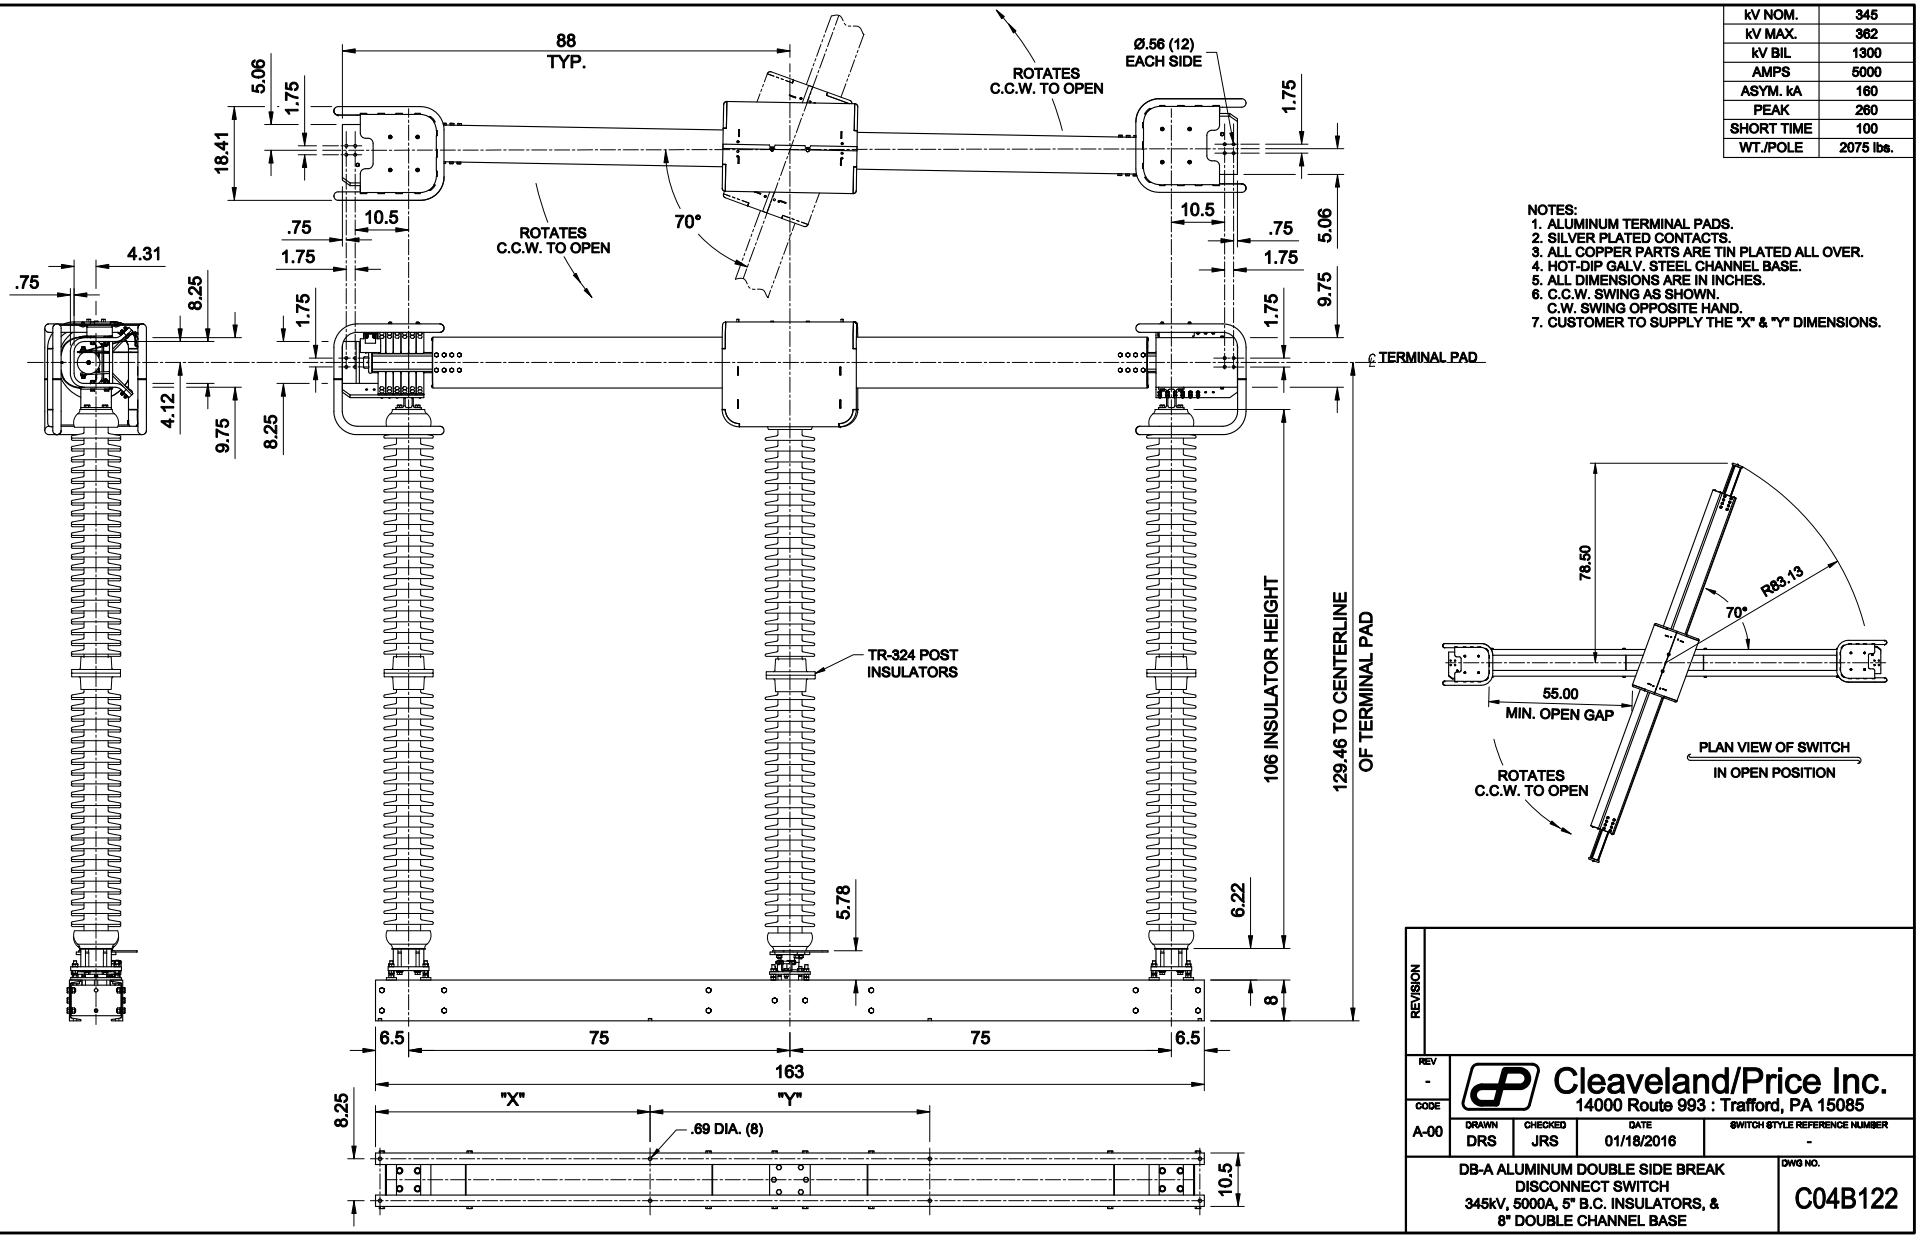


REVISION

REV -

CODE A-00

Cleaveland/Price Inc.
14000 Route 993 : Trafford, PA 15085

| DRAWN | CHECKED | DATE | SWITCH STYLE REFERENCE NUMBER |
|---|---|---|---|
| DRS | JRS | 01/18/2016 | - |

DB-A ALUMINUM DOUBLE SIDE BREAK
DISCONNECT SWITCH
345kV, 5000A, 5" B.C. INSULATORS, &
8" DOUBLE CHANNEL BASE

DWG NO. C04B122