kV NOM.	345
kV MAX.	362
kV BIL	1300
AMPS	3000
ASYM. kA	120
PEAK	195
SHORT TIME	75
WT./POLE	1850 lbs.

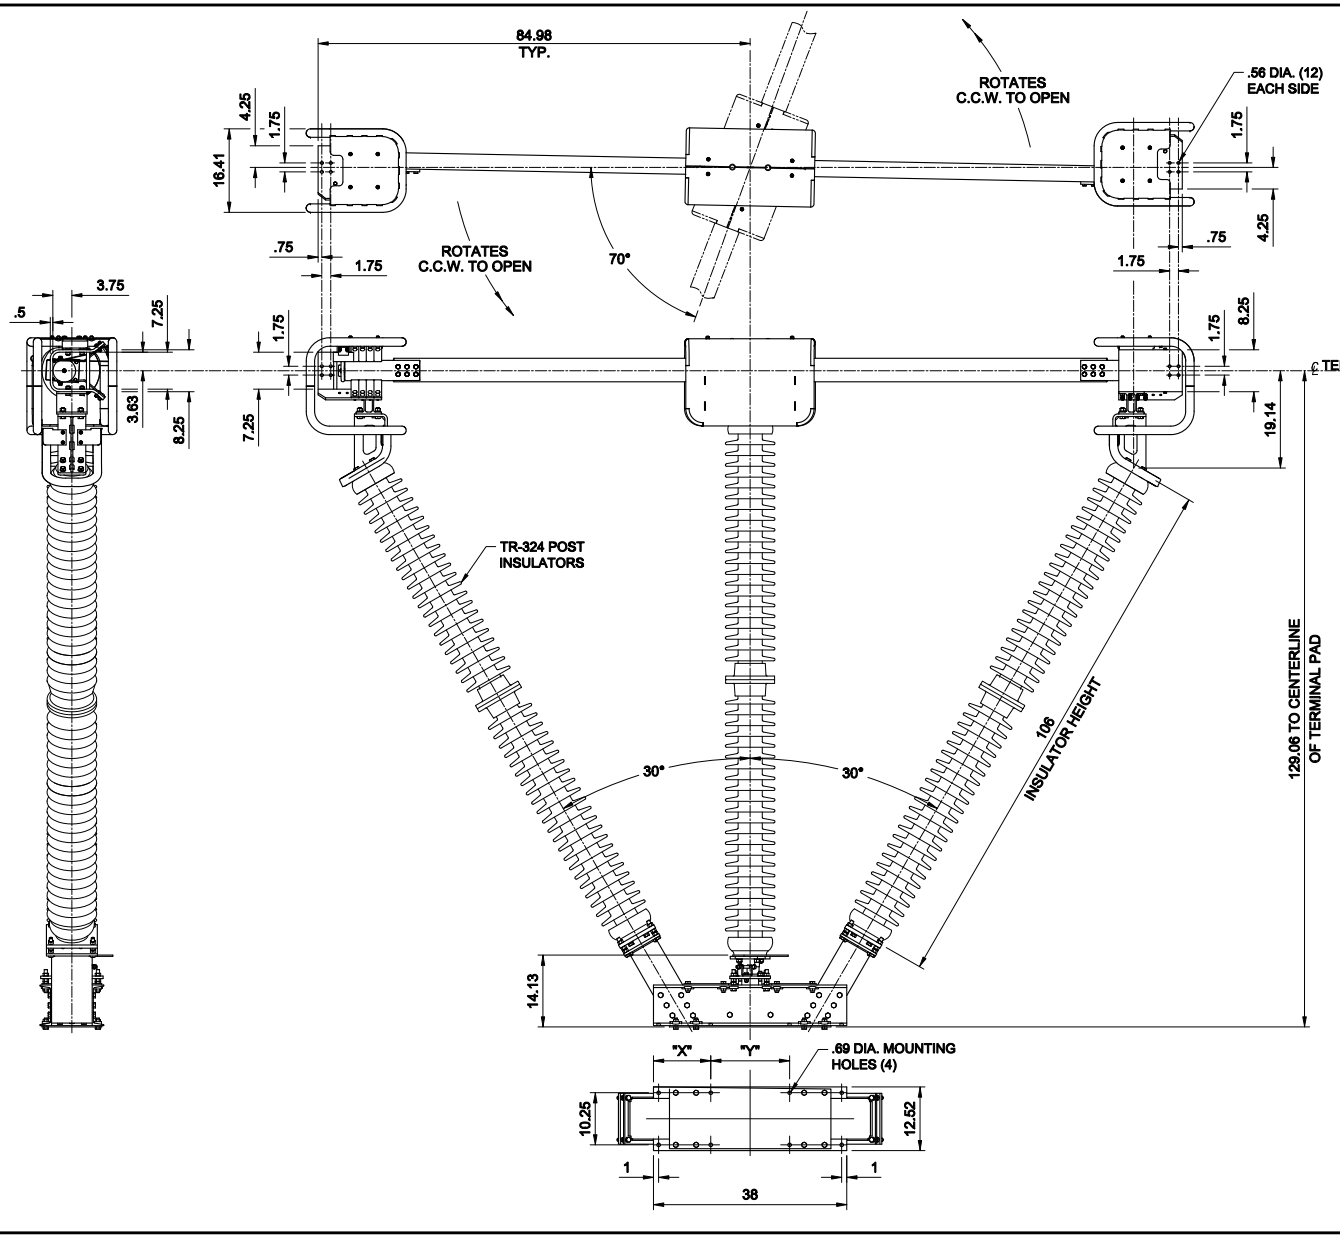

NOTES:
1. ALUMINUM TERMINAL PADS.
2. SILVER PLATED CONTACTS.
3. ALL COPPER PARTS ARE TIN PLATED ALL OVER.
4. HOT-DIP GALV. STEEL CHANNEL BASE.
5. ALL DIMENSIONS ARE IN INCHES.
6. C.C.W. SWING AS SHOWN.
   C.W. SWING OPPOSITE HAND.
7. CUSTOMER TO SUPPLY THE "X" & "Y" DIMENSIONS.

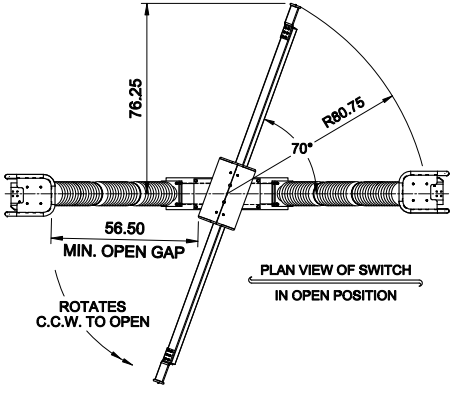

PLAN VIEW OF SWITCH
IN OPEN POSITION

REVISION

REV	CODE	DRAWN	CHECKED	DATE	SWITCH STYLE REFERENCE NUMBER
-	A00	DRS	JRS	01/21/2016	-

Cleaveland/Price Inc.
14000 Route 993 : Trafford, PA 15085

DB-AV ALUMINUM DOUBLE SIDE BREAK
DISCONNECT SWITCH
345kV, 3000A, 5" B.C. INSULATORS, &
8" DOUBLE CHANNEL BASE

DWG NO.
C04B128