


GROUP NO.	RATINGS					POST INSULATOR NEMA TR #	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []								WEIGHT PER POLE (INCLUDING INSULATORS)	
	kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.		"A"	"B"	"C"	"D"	"E"	"F"	"R1"	"R2"	lbs	kg
G01	69	72.5	350	2000	100	278	43.04 [1093]	30 [762]	33.21 [844]	25.98 [660]	32 [813]	15 [381]	33.48 [850]	28.68 [728]	481	[218]
G02	115	123	550			286	56.03 [1423]	45 [1143]	40.71 [1034]	38.97 [990]	50 [1270]	19.30 [490]	42.05 [1068]	37.25 [946]	617	[280]
G03	138	145	650			288	63.83 [1621]	54 [1372]	45.21 [1148]	46.77 [1188]	60 [1524]	21.90 [556]	47.24 [1200]	42.44 [1078]	688	[312]
G04	161	170	750			291	70.75 [1797]	62 [1575]	49.21 [1250]	53.69 [1364]	68 [1727]	24.25 [616]	51.80 [1316]	47 [1194]	873	[397]

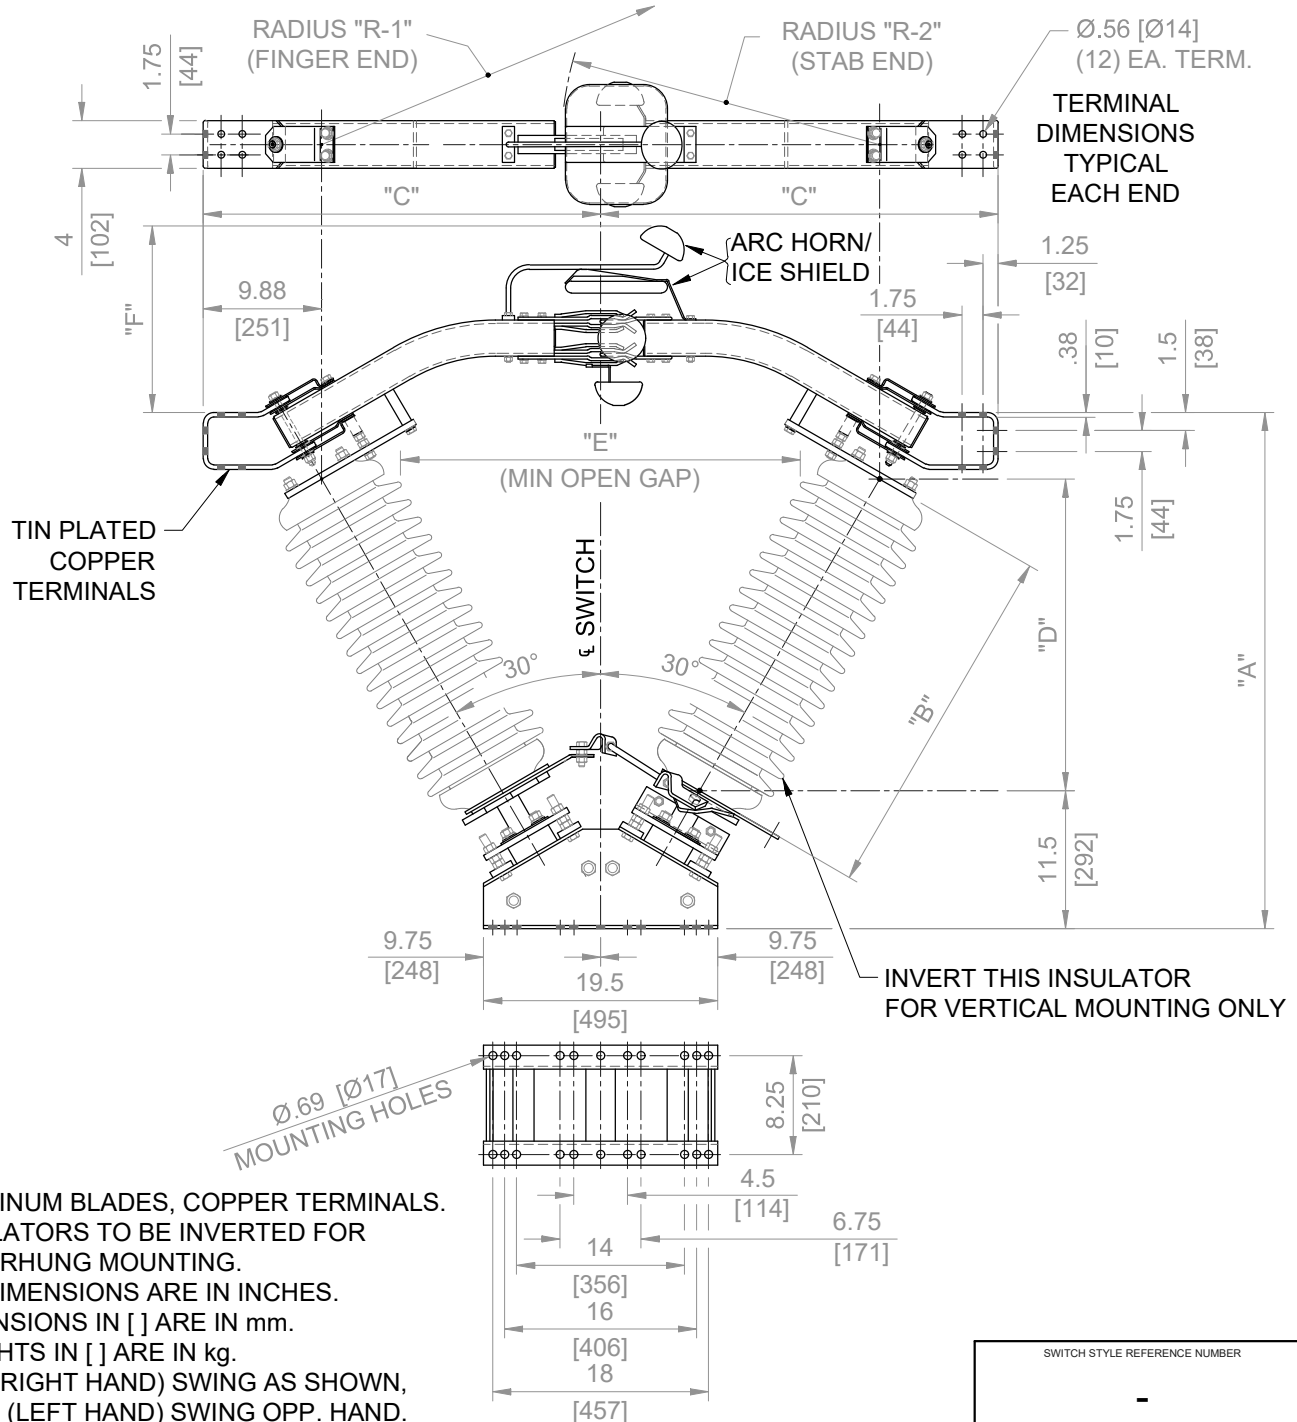

NOTES:

1. ALUMINUM BLADES, COPPER TERMINALS.
2. INSULATORS TO BE INVERTED FOR UNDERHUNG MOUNTING.
3. ALL DIMENSIONS ARE IN INCHES.
4. DIMENSIONS IN [] ARE IN mm.
5. WEIGHTS IN [] ARE IN kg.
6. C.W. (RIGHT HAND) SWING AS SHOWN, C.C.W. (LEFT HAND) SWING OPP. HAND.

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550										SWITCH STYLE REFERENCE NUMBER		REV
										-		A
										DRAWN	DATE	VERSION
										MES	07/14/2005	2
										CHECKED	DRAWING NO.	
										LAB	C26A023	
										APPROVED		

CB-AV ALUMINUM CENTER-BREAK DISCONNECT SWITCH,
69-161kV, 2000A, WITH 5" BOLT CIRCLE INSULATORS