


NOTES:

1. ALUMINUM BLADES.
2. ALL COPPER PARTS ARE TIN PLATED ALL OVER.
3. INSULATORS AND ARC HORNS/ICE SHIELDS INVERTED FOR UNDERHUNG MOUNTING.
4. ALL DIMENSIONS ARE IN INCHES.
5. ALL DIMENSIONS IN [] ARE IN MM.
6. ALL WEIGHTS IN [] ARE IN KG.
7. C.W. (RIGHT HAND) SWING AS SHOWN, C.C.W. (LEFT HAND) SWING OPPOSITE HAND.

kV NOM.	69
kV MAX.	72.5
kV BIL	350
AMPS	2000
MOM kA	100
WT./POLE	323 lbs. [147]

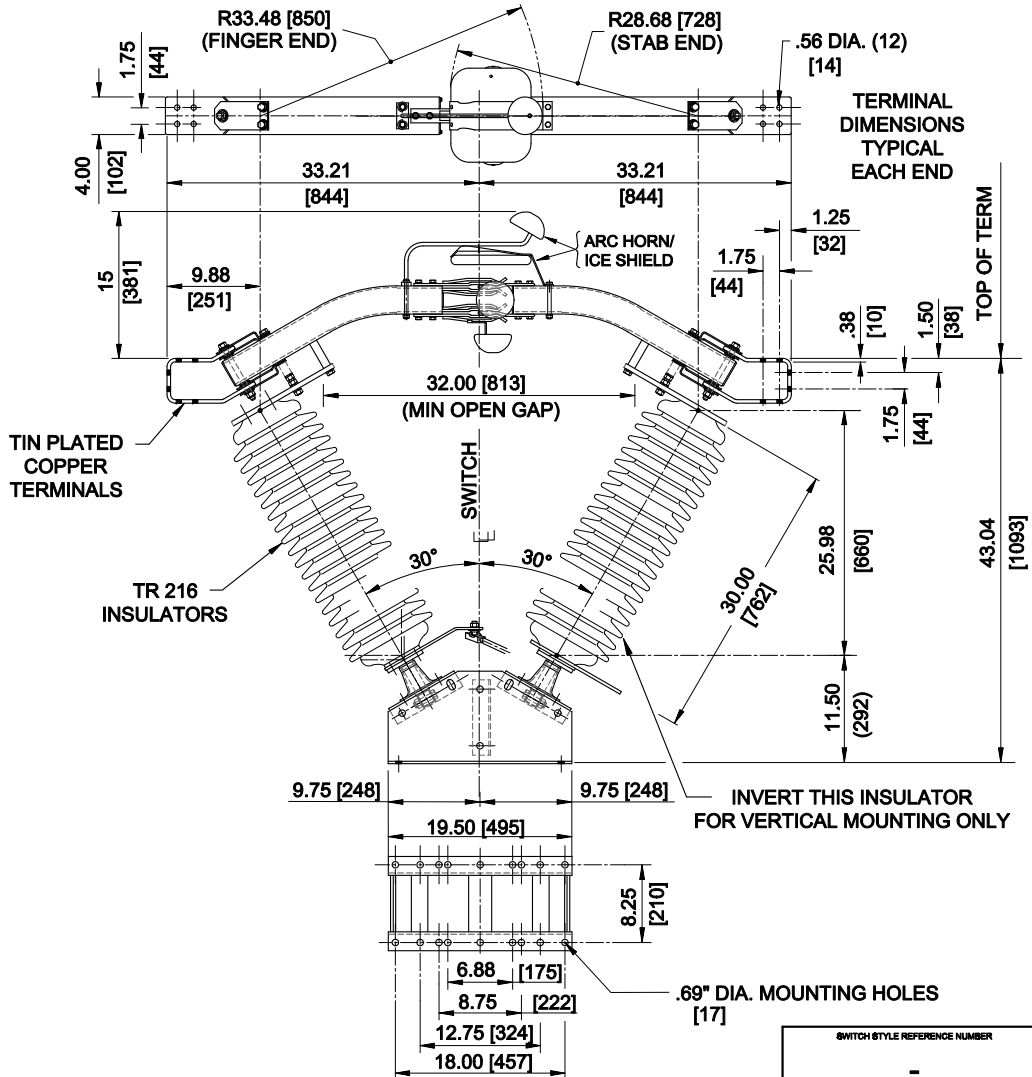

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550

**CB-AV ALUMINUM CENTER BREAK VEE DISCONNECT SWITCH,
69kV, 2000A, WITH 3\" B.C. INSULATORS**

SWITCH STYLE REFERENCE NUMBER		REV
-		B
DRAWN	DATE	VERSION
GH	08/23/2002	2
CHECKED	DRAWING NO.	
SF	C26A020	
APPROVED		