


GROUP NO.	RATINGS					POST INSULATOR NEMA TR #	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []						WEIGHT/POLE (INCLUDING INSULATORS)	
	kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.		"A"	"B"	"C"	"D"	"E"	"F"	lbs.	kg
G01	23	27	150	600	40	208	21.43	14	39.25	24	15	49.93	192	[87]
G02				1200	61		[544]	[356]	[997]	[610]	[381]	[1268]	199	[90]
G03	34.5	38	200	600	40	210	25.43	18	37	24	18	53.93	226	[103]
G04				1200	61		[646]	[457]	[940]	[610]	[457]	[1370]	234	[106]
G05	46	48.3	250	600	40	214	29.43	22	40.75	30	22	63.93	280	[127]
G06				1200	61		[748]	[559]	[1035]	[762]	[559]	[1624]	311	[131]
G07	69	72.5	350	600	40	216	37.43	30	46	40	32	81.93	392	[178]
* G08				1200	61		[951]	[762]	[1168]	[1016]	[813]	[2081]	401	[182]

SWITCH WITH AN ASTERISK (*) IS COUNTERBALANCED

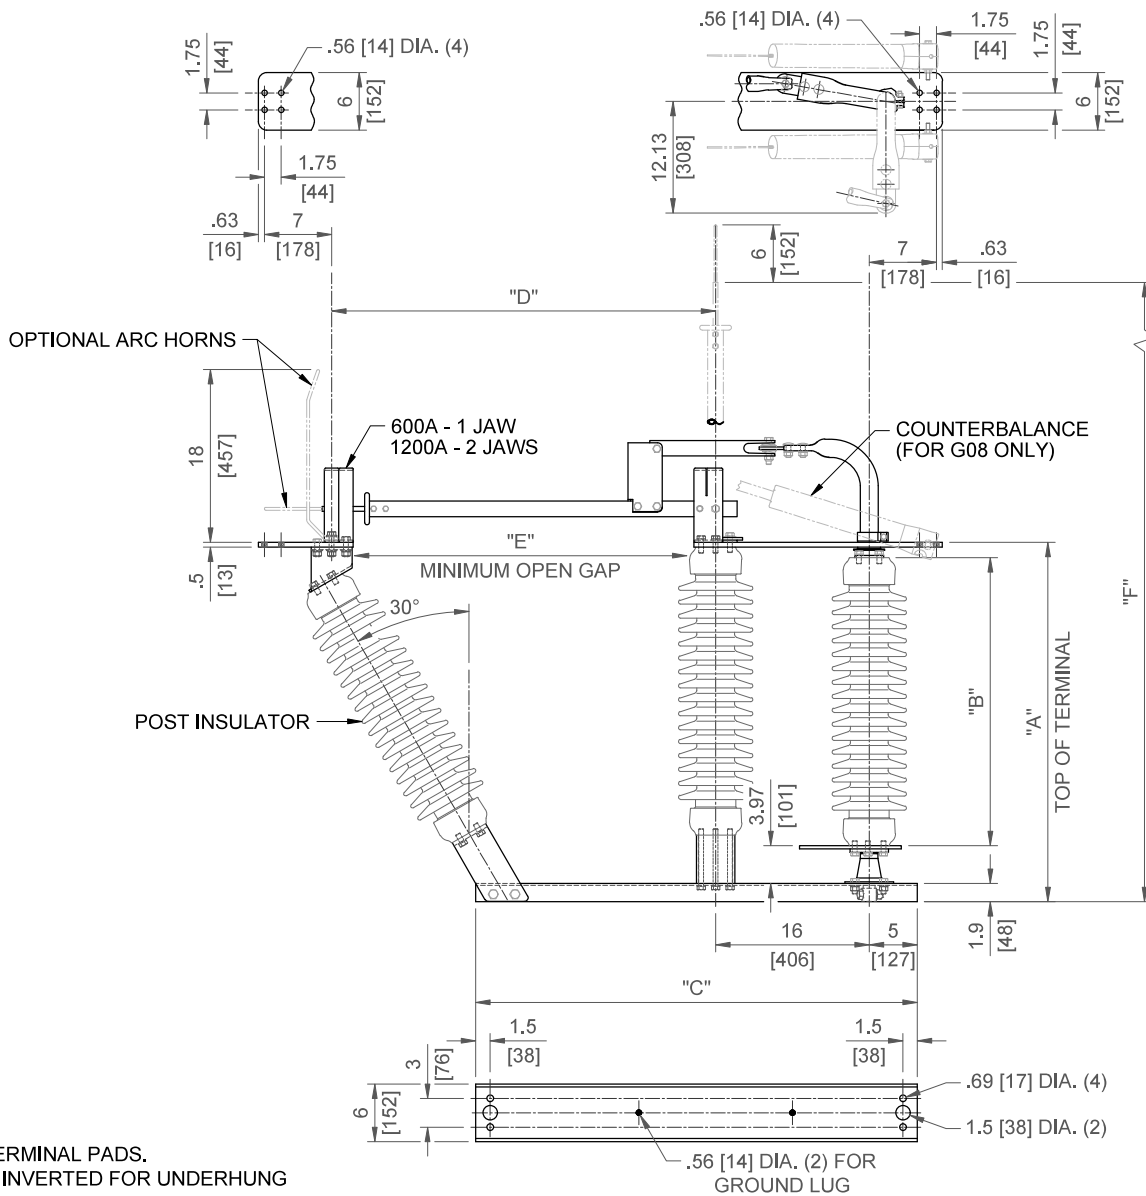

NOTES:

1. ALUMINUM TERMINAL PADS.
2. INSULATORS INVERTED FOR UNDERHUNG MOUNTING.
3. CUSTOMER TO SUPPLY "X" AND "Y" DIMENSIONS.
4. ALL DIMENSIONS ARE IN INCHES.
5. DIMENSIONS SHOWN IN [] ARE IN MILLIMETERS.
6. WEIGHTS SHOWN IN [] ARE IN KILOGRAMS.
7. SWITCH STYLE NUMBERS SHOWN WITH (*), ARE COUNTERBALANCED.

5. DIMENSIONS SHOWN IN [] ARE IN MILLIMETERS. 6. WEIGHTS SHOWN IN [] ARE IN KILOGRAMS. 7. SWITCH STYLE NUMBERS SHOWN WITH (*), ARE COUNTERBALANCED.	SWITCH STYLE REFERENCE NUMBER		REV A
Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550	DRAWN AGM	DATE 04/29/2014	VERSION 1
V2-CAV ALUMINUM VERTICAL BREAK DISCONNECT SWITCH 23-69kV, 600-1200A, 3" B.C. INSULATORS WITH 30° INCLINED JAW END INSULATOR AND 6" CHANNEL BASE	CHECKED RC APPROVED	DRAWING NO. C06A1547	