


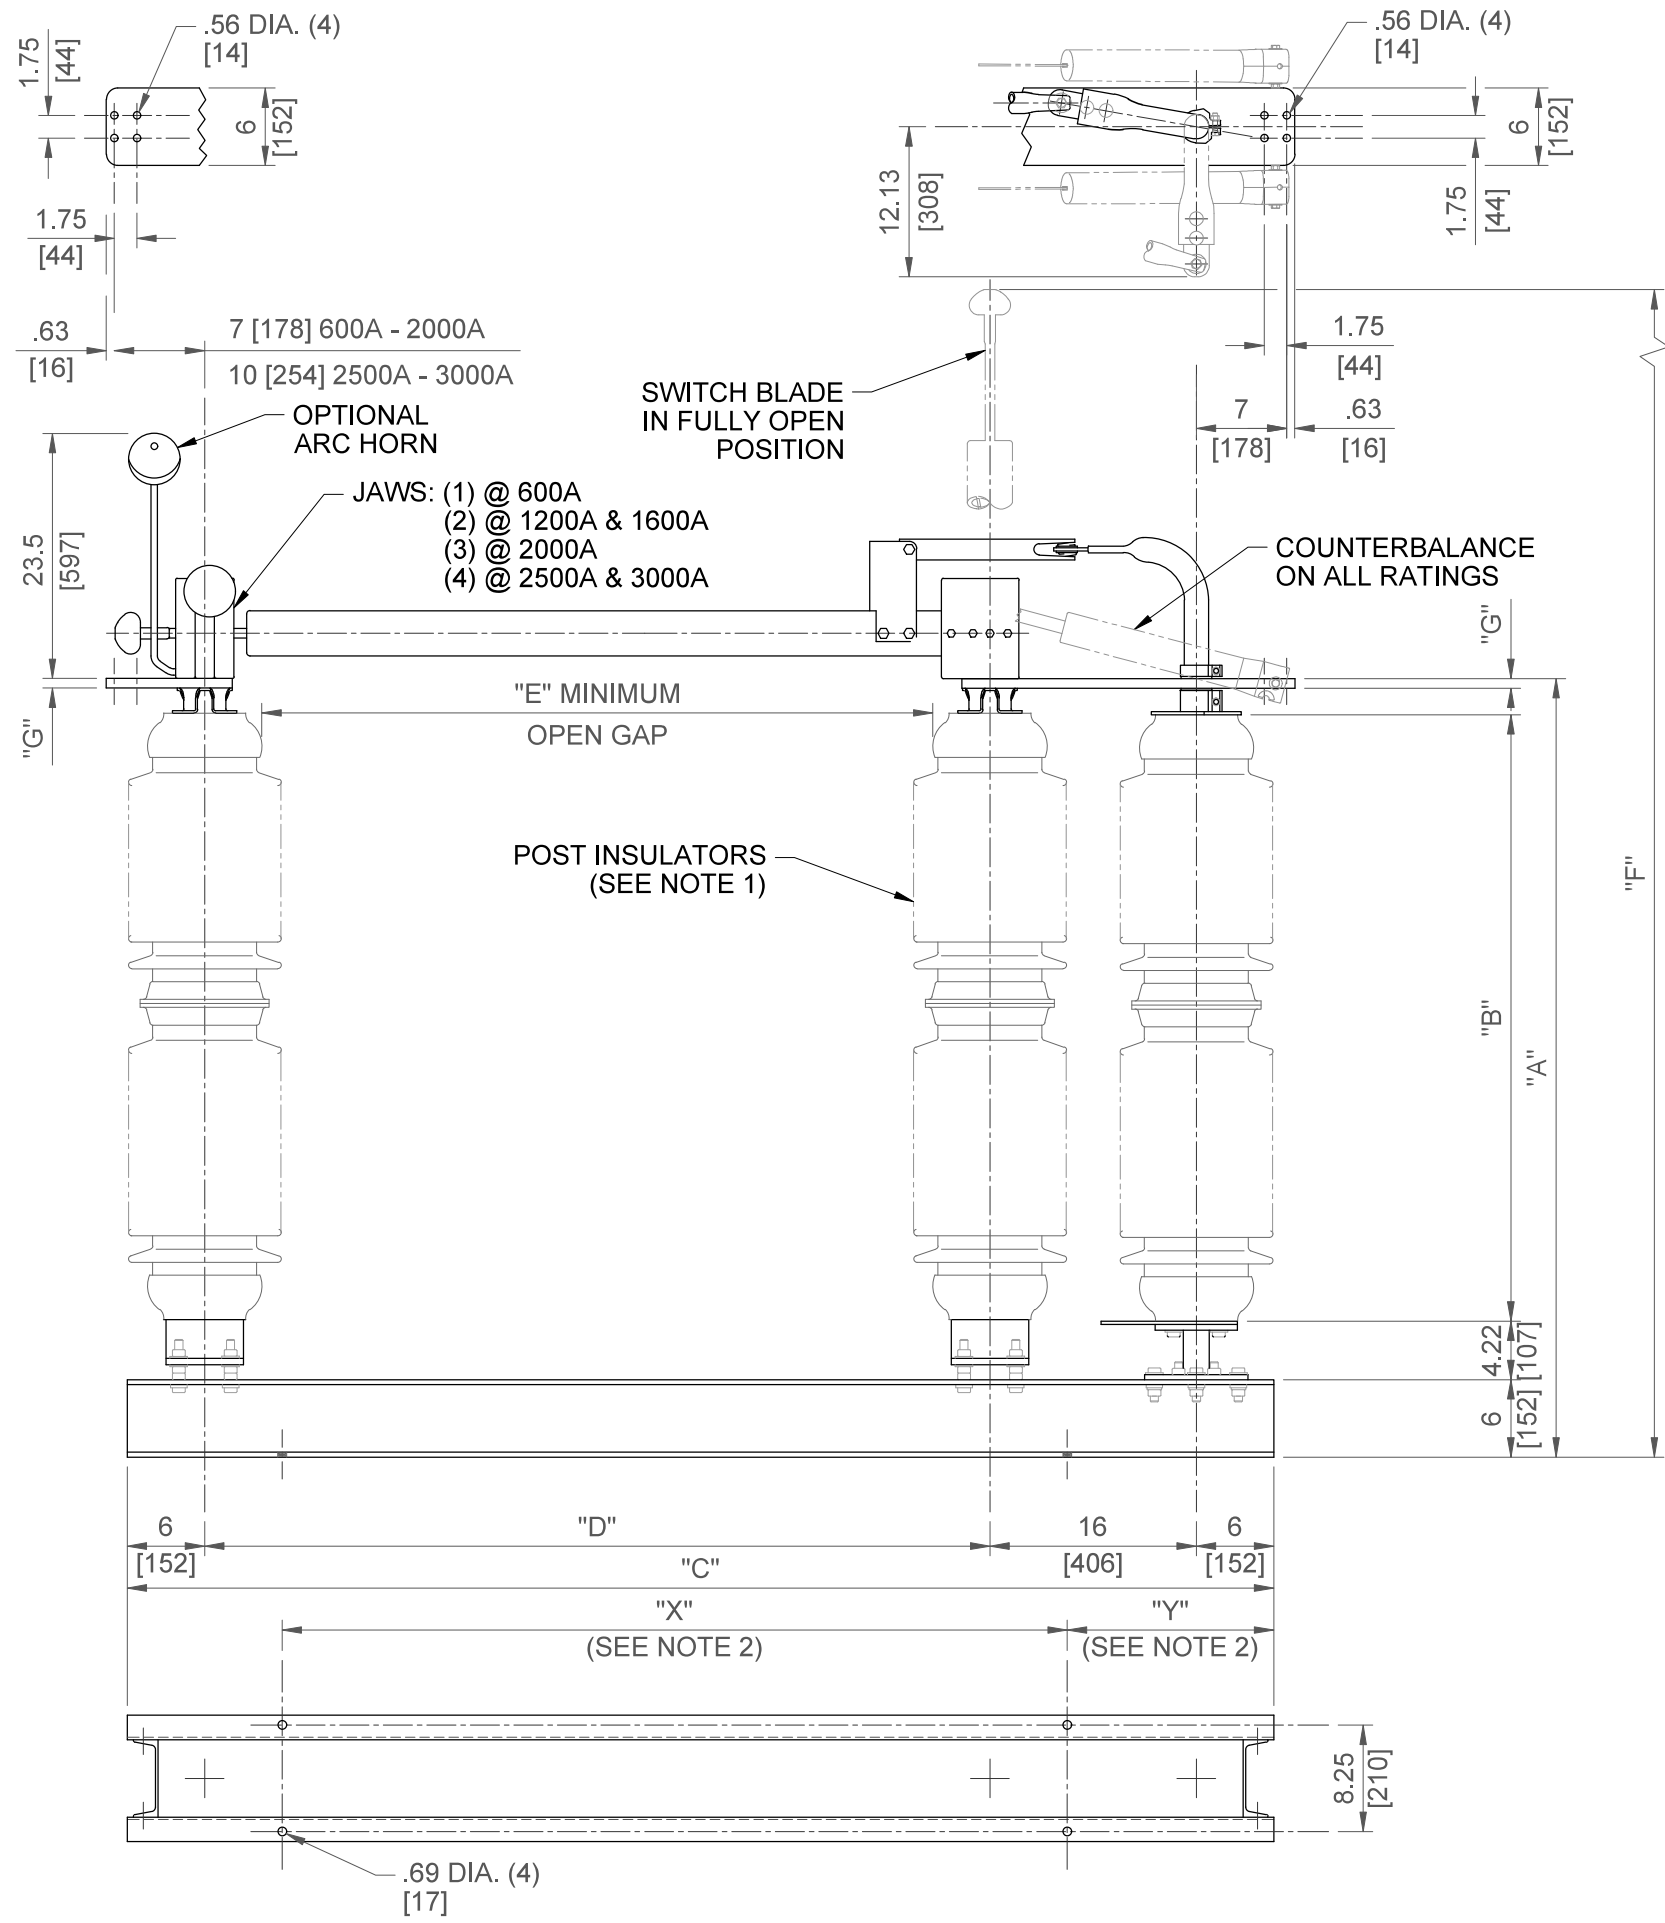

SWITCH STYLE NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []							WEIGHT/POLE (INCL. INSUL.)	
	NOM kV	MAX kV	kV BIL	AMPS	MOM kA		"A"	"B"	"C"	"D"	"E"	"F"	"G"	LBS.	kg
C06B036G01	115	123	550	600	40	286	57.78 [1468]	45 [1143]	88 [2235]	60 [1524]	50 [1270]	126.72 [3219]	.5 [13]	915	[416]
C06B036G02				1200	61									928	[422]
C06B036G03				1600	70									937	[426]
C06B036G04				2000	100							128.22 [3257]		942	[428]
*C06B036G05				2500	100							129.72 [3295]		967	[439]
*C06B036G06				3000	120		58.03 [1474]					129.97 [3301]	.75 [19]	992	[450]
C06B036G07	138	145	650	600	40	288	66.78 [1696]	54 [1372]	98 [2489]	70 [1778]	60 [1524]	145.72 [3701]	.5 [13]	1013	[460]
C06B036G08				1200	61									1025	[466]
C06B036G09				1600	70									1045	[475]
*C06B036G10				2000	100							147.22 [3739]		1050	[477]
C06B036G11				2500	100		67.03 [1703]					148.97 [3784]	.75 [19]	1075 Ⓐ	[488]
*C06B036G12				3000	120									1091	[495]
C06B036G13	161	170	750	600	40	291	74.78 [1899]	62 [1575]	106 [2692]	78 [1981]	68 [1727]	161.72 [4108]	.5 [13]	1112	[505]
C06B036G14				1200	61									1125	[511]
C06B036G15				1600	70									1140	[518]
*C06B036G16				2000	100							163.22 [4146]		1145	[520]
C06B036G17				2500	100							75.03 [1906]		164.97 [4190]	.75 [19]
*C06B036G18				3000	120		1195 Ⓐ						[542]		

Ⓐ = COPPER TERMINAL PADS WITH ALUMINUM BLADE

- NOTES:
- INSULATORS INVERTED FOR UNDERHUNG MOUNTING. (SEE NOTE 6)
 - CUSTOMER TO SUPPLY "X" & "Y" DIMENSIONS.
 - ALL DIMENSIONS ARE IN INCHES.
 - DIMENSIONS IN [] ARE IN mm.
 - WEIGHTS IN [] ARE IN kg.
 - SWITCH STYLE NUMBERS SHOWN WITH *, ARE NOT AVAILABLE IN UNDERHUNG MOUNTING CONFIGURATION.

REV F	 Cleaveland/Price Inc. 14000 Route 993 : Trafford, PA 15085					
VERSION 1	DRAWN MJG	CHECKED DP	APPROVED	DATE 08/15/2001	SHEET 1 OF 1	SCALE PROPORTIONAL
V2-C COPPER VERTICAL BREAK DISCONNECT SWITCH 115kV-161kV; 600-3000A						DWG NO. C06B036