


GROUP No.	RATINGS							DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []						WEIGHT/POLE (INCL. INSUL.)	
	kV NOM.	kV MAX.	kA MOM.	kA PEAK	AMPS	kV BIL	CRITICAL FLASHOVER VALUE	"A"	"B"	"C"	"D"	"F"	"R"	LBS	Kg
G002	230	245	61	99	1200	1050	1300 kV (pos.)	113.6 [2885]	95.81 [2434]	103.63 [2632]	72 [1829]	9 [229]	92.65 [2353]	138	[62.6]

MAX. WORKING LOAD - 40,000 LBS

1.7" [43] x 3.5" [89] EYE EACH END
(FOR STRAIN HARDWARE ATTACHMENT
BY CUSTOMER.)

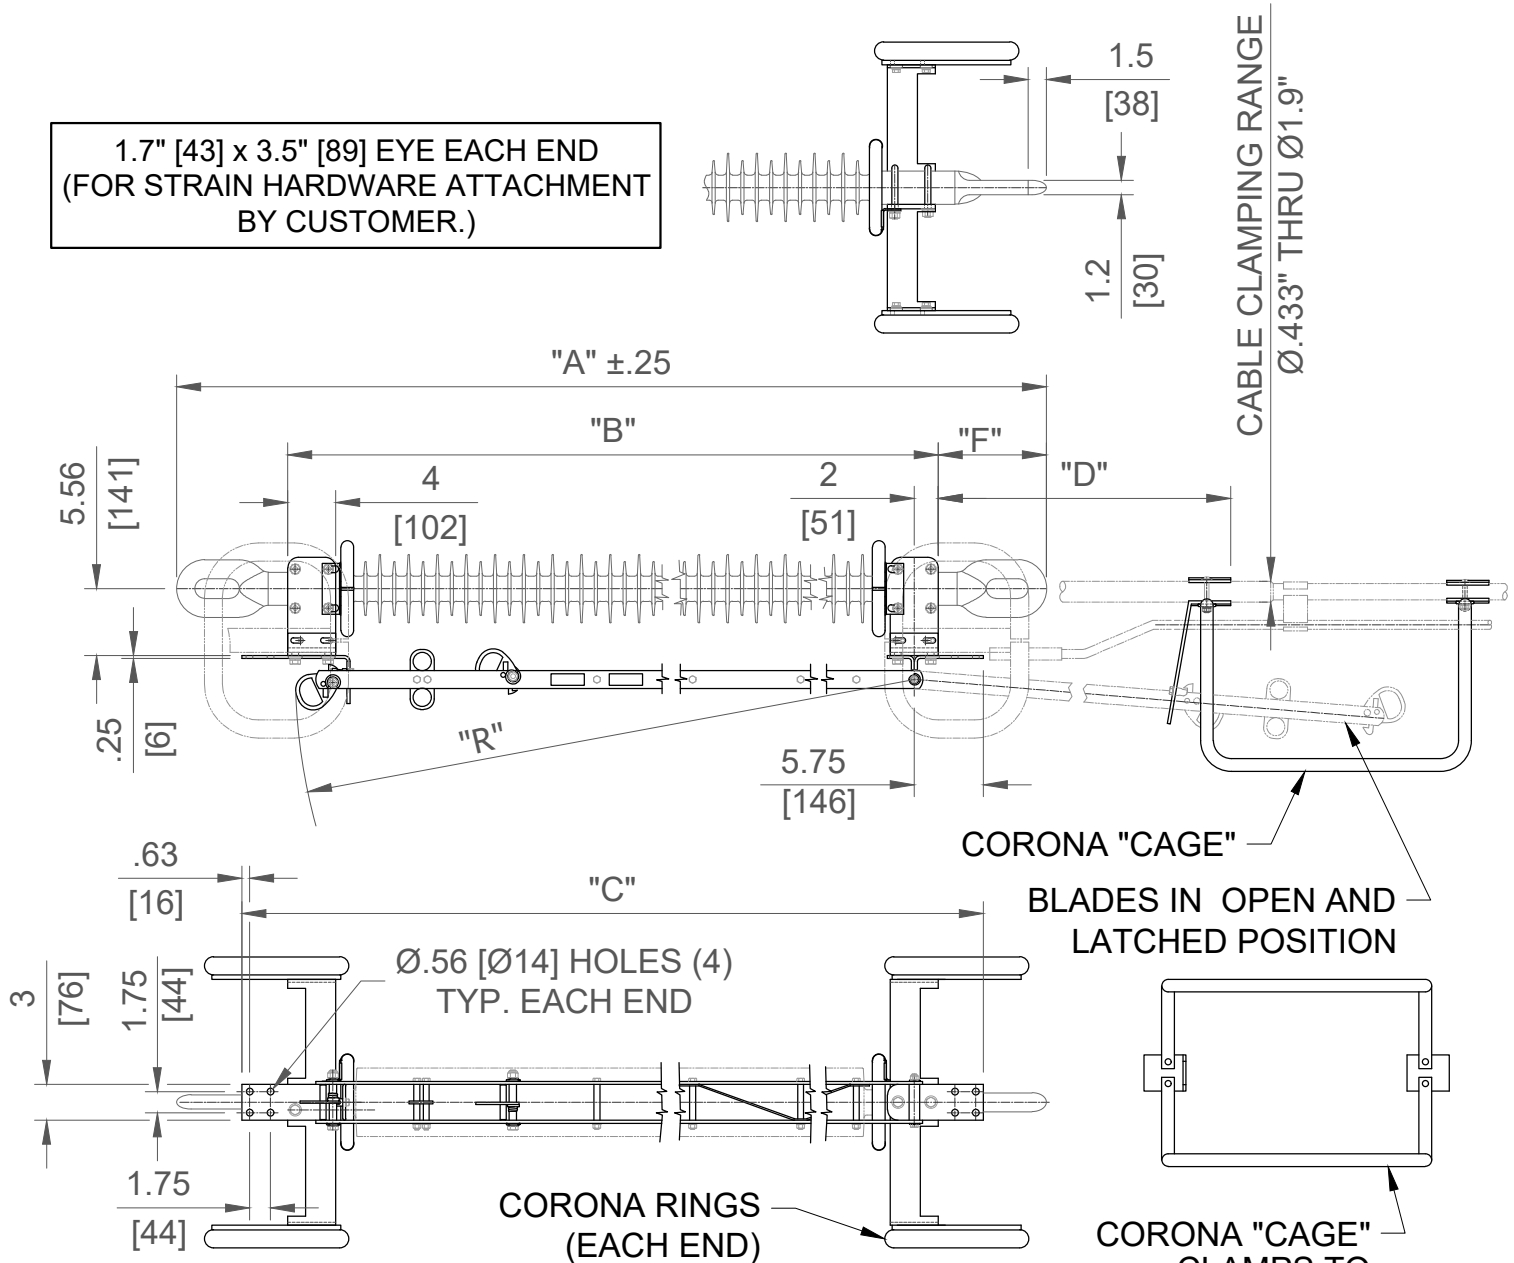

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS IN [] ARE IN MM.

CORONA "CAGE"
CLAMPS TO
CUSTOMER'S CABLE

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550

ILO-C COPPER IN-LINE HOOKSTICK OPER. DISCONNECT SWITCH
230kV, 1050 BIL, 1200 AMPS, 61kA MOM. WITH
NGK LOCKE POLYMER SUSPENSION INSULATOR

SWITCH STYLE REFERENCE NUMBER		REV
-		G
DRAWN	DATE	VERSION
GH	08/02/1998	1
CHECKED	DRAWING NO. C02A027	
SF		
APPROVED		