


GROUP NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []								WEIGHT/POLE (INCL. INSULS)					
	AMPS	kA MOM.	kV NOM.	kV MAX.	kV BIL		"A"		"B"		"C"		"D"		"E"		"F"		LBS	kg
G01	3000	120	7.2	8.3	95	222	23.28	[591]	10	[254]	45	[1143]	17	[432]	7	[178]	48.03	[1220]	407	[184.7]
G02			14.4	15.5	110	225	25.28	[642]	12	[305]	45	[1143]	17	[432]	10	[254]	50.03	[1271]	422	[191.6]
* G03			23	27	150	227	28.28	[718]	15	[381]	55	[1397]	27	[686]	12	[305]	63.03	[1601]	516	[234.3]
* G04			34.5	38	200	231	33.28	[845]	20	[508]	55	[1397]	27	[686]	18	[457]	68.03	[1728]	590	[267.9]
* G05			46	48.3	250	267	37.28	[947]	24	[610]	60	[1524]	32	[813]	22	[559]	77.03	[1957]	650	[295.1]
* G06			69	72.5	350	278	43.28	[1099]	30	[762]	70	[1778]	42	[1067]	32	[813]	93.03	[2363]	825	[374.6]
G07	2500	100	7.2	8.3	95	222	23.28	[591]	10	[254]	45	[1143]	17	[432]	7	[178]	48.03	[1220]	397	[180.2]
G08			14.4	15.5	110	225	25.28	[642]	12	[305]	45	[1143]	17	[432]	10	[254]	50.03	[1271]	412	[187.0]
* G09			23	27	150	227	28.28	[718]	15	[381]	55	[1397]	27	[686]	12	[305]	63.03	[1601]	506	[229.7]
* G10			34.5	38	200	231	33.28	[845]	20	[508]	55	[1397]	27	[686]	18	[457]	68.03	[1728]	580	[263.3]
* G11			46	48.3	250	267	37.28	[947]	24	[610]	60	[1524]	32	[813]	22	[559]	77.03	[1957]	640	[290.6]
* G12			69	72.5	350	278	43.28	[1099]	30	[762]	70	[1778]	42	[1067]	32	[813]	93.03	[2363]	815	[370.0]

SWITCHES WITH AN
ASTERISK (*) ARE
COUNTERBALANCED

NOTES:

1. INSULATORS INVERTED FOR UNDERHUNG MOUNTING.
2. ALL DIMENSIONS ARE IN INCHES.
3. DIMENSIONS IN [] ARE IN mm.
4. WEIGHTS IN [] ARE IN kg.
5. CUSTOMER TO SPECIFY "X" AND "Y" DIMENSIONS

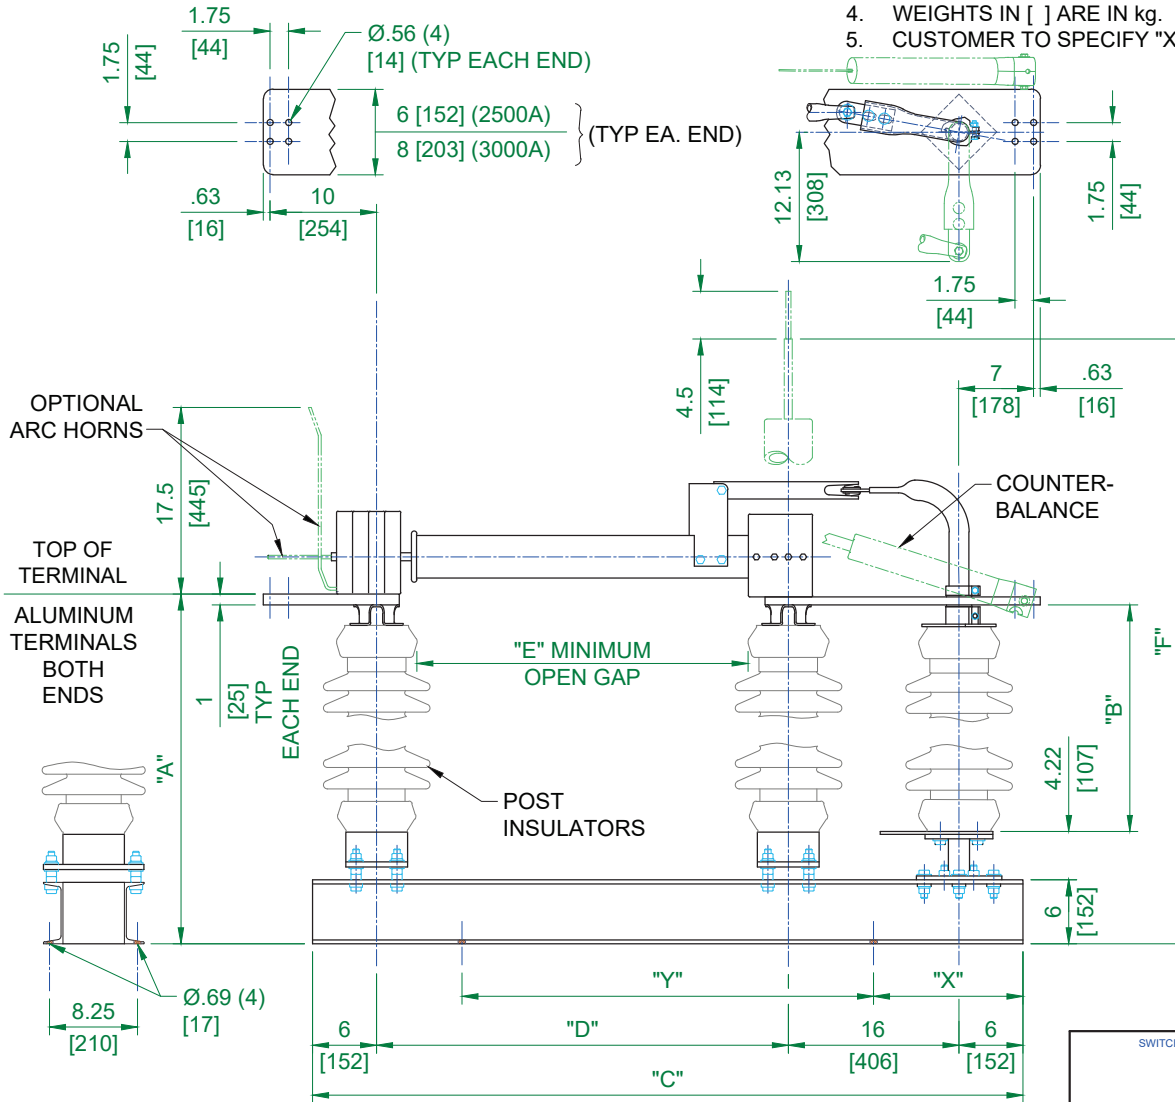

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550

**V2-CA ALUMINUM VERTICAL BREAK DISCONNECT SWITCH
7.2-69kV 2500-3000A WITH 5" BC INSULATORS**

SWITCH STYLE REFERENCE NUMBER

N/A

REV

G

DRAWN
GH

DATE
01/12/1994

VERSION
1

CHECKED
PMK
APPROVED

DRAWING NO.

C06A020