GROUP NO.	RATINGS kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.	POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN [ ] "A"	"B"	"C"	"D"	"E"	"F"	"S"	"T"	WEIGHT/POLE [INCL. INSUL.] LBS	kg
G01	7.2	8.3	95	600	40	202	14.93 [379]	7.5 [190]	41 [1041]	15 [381]	7 [178]	34.68 [881]	20.43 [519]	10.15 [258]	117	[53.1]
G02				1200	61								21.00 [533]	10.53 [267]	123	[55.8]
G03				1600	70								21.19 [538]	10.95 [278]	128	[58.1]
G04				2000	100		15.18 [386]					36.43 [925]	21.69 [551]	11.48 [292]	139	[63.0]
G05	14.4	15.5	110	600	40	205	17.43 [443]	10 [254]	41 [1041]	15 [381]	10 [254]	37.18 [944]	20.46 [520]	11.37 [289]	133	[60.3]
G06				1200	61								21.00 [533]	11.75 [298]	139	[63.0]
G07				1600	70								21.13 [537]	12.19 [310]	145	[65.8]
G08				2000	100		17.68 [449]					38.93 [989]	21.61 [549]	12.71 [323]	156	[70.8]
G09	23	27	150	600	40	208	21.43 [544]	14 [356]	50 [1270]	24 [610]	12 [305]	50.18 [1275]	23.52 [597]	12.96 [329]	167	[75.7]
G10				1200	61								24.14 [613]	13.41 [341]	174	[78.9]
G11				1600	70								24.19 [614]	13.67 [347]	178	[80.7]
G12				2000	100		21.68 [551]					51.93 [1319]	24.80 [630]	14.79 [376]	197	[89.4]
G13	34.5	38	200	600	40	210	25.43 [646]	18 [457]	50 [1270]	24 [610]	18 [457]	54.18 [1376]	23.57 [599]	14.89 [378]	197	[89.4]
G14				1200	61								24.07 [611]	15.38 [391]	204	[92.5]
G15				1600	70								24.10 [612]	15.66 [398]	208	[94.4]
G16				2000	100		25.68 [652]					55.93 [1421]	24.58 [624]	16.80 [427]	227	[103.0]
G17	46	48.3	250	600	40	214	29.43 [748]	22 [559]	56 [1422]	30 [762]	22 [559]	64.18 [1630]	25.61 [650]	16.68 [424]	234	[106.1]
G18				1200	61								26.17 [665]	17.16 [436]	242	[109.8]
G19				1600	70								26.19 [665]	17.44 [443]	245	[111.1]
* G20				2000	100		29.68 [754]					65.93 [1675]	26.21 [666]	19.64 [499]	271	[122.9]
G21	69	72.5	350	600	40	216	37.43 [951]	30 [762]	66 [1676]	40 [1016]	32 [813]	82.18 [2087]	29.09 [739]	20.39 [518]	328	[148.8]
* G22				1200	61								29.32 [745]	21.24 [539]	343	[155.6]
* G23				1600	70								29.34 [745]	21.50 [546]	347	[157.4]
* G24				2000	100		37.68 [957]					83.93 [2132]	29.62 [752]	22.71 [577]	367	[166.5]

SWITCHES WITH AN ASTERISK (*) ARE COUNTERBALANCED

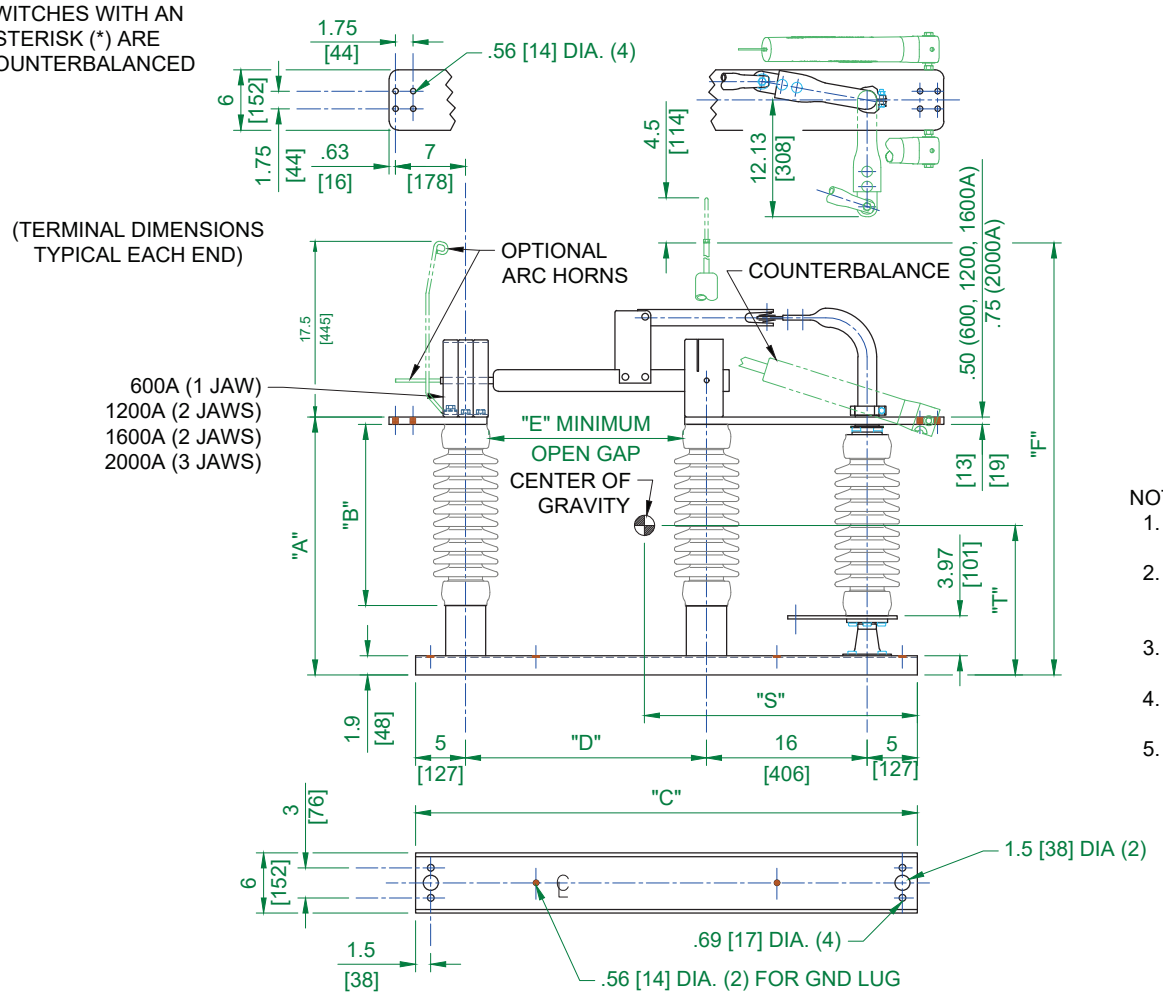

NOTES:
1. ALUMINUM TERMINAL PADS
2. INSULATORS INVERTED FOR UNDERHUNG MOUNTING.
3. ALL DIMENSIONS ARE IN INCHES.
4. DIMENSIONS IN [ ] ARE IN mm.
5. WEIGHTS IN [ ] ARE IN kg.

Cleaveland/Price Inc. *14000 Rt. 993 Trafford, PA 15085-9550*	DRAWN MJG	DATE 10/11/1996	VERSION 1
V2-CA ALUMINUM VERTICAL BREAK DISCONNECT SWITCH 7.2kV-69kV; 600A-2000A; WITH 3" B.C. INSULATORS	CHECKED GH / APPROVED	DRAWING NO. C06A032	REV F