


GROUP	RATINGS								DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []									WEIGHT/POLE (INCL. INSUL.)	
	kV NOM.	kV MAX.	kV BIL	BIL REQD.	TESTED BIL	AMPS	kA NOM.	kA PEAK	"A"	"B"	"C"	"D"	"ER"	"F"	"G"	"H"	"R"	LBS.	KG.
G01	69	72.5	350	385	389	1200	61	99	50.4 [1280]	37.6 [955]	45.25 [1149]	17 [431]	25.5 [648]	6.4 [163]	21.13 [537]	23.13 [588]	34.75 [883]	54	24.5
G02	115	123	550	605	628	1200	61	99	64.6 [1641]	53 [1346]	60.63 [1540]	30.18 [766]	40.5 [1029]	5.8 [147]	19.13 [486]	21.13 [537]	50.25 [1276]	64	29
G03	138	145	650	715	716	1200	61	99	75.2 [1910]	62.2 [1580]	69.83 [1774]	39.31 [998]	50 [1270]	6.5 [165]	25.13 [638]	31.63 [803]	59.5 [1511]	70	31.8
G04	161	170	750	825	829	1200	61	99	83.5 [2121]	70.4 [1788]	78 [1981]	47.62 [1209]	59 [1499]	6.55 [166]	25.13 [638]	31.63 [803]	67.65 [1718]	81	36.7

MAX. WORKING LOAD - 25,000 LBS ALL RATINGS

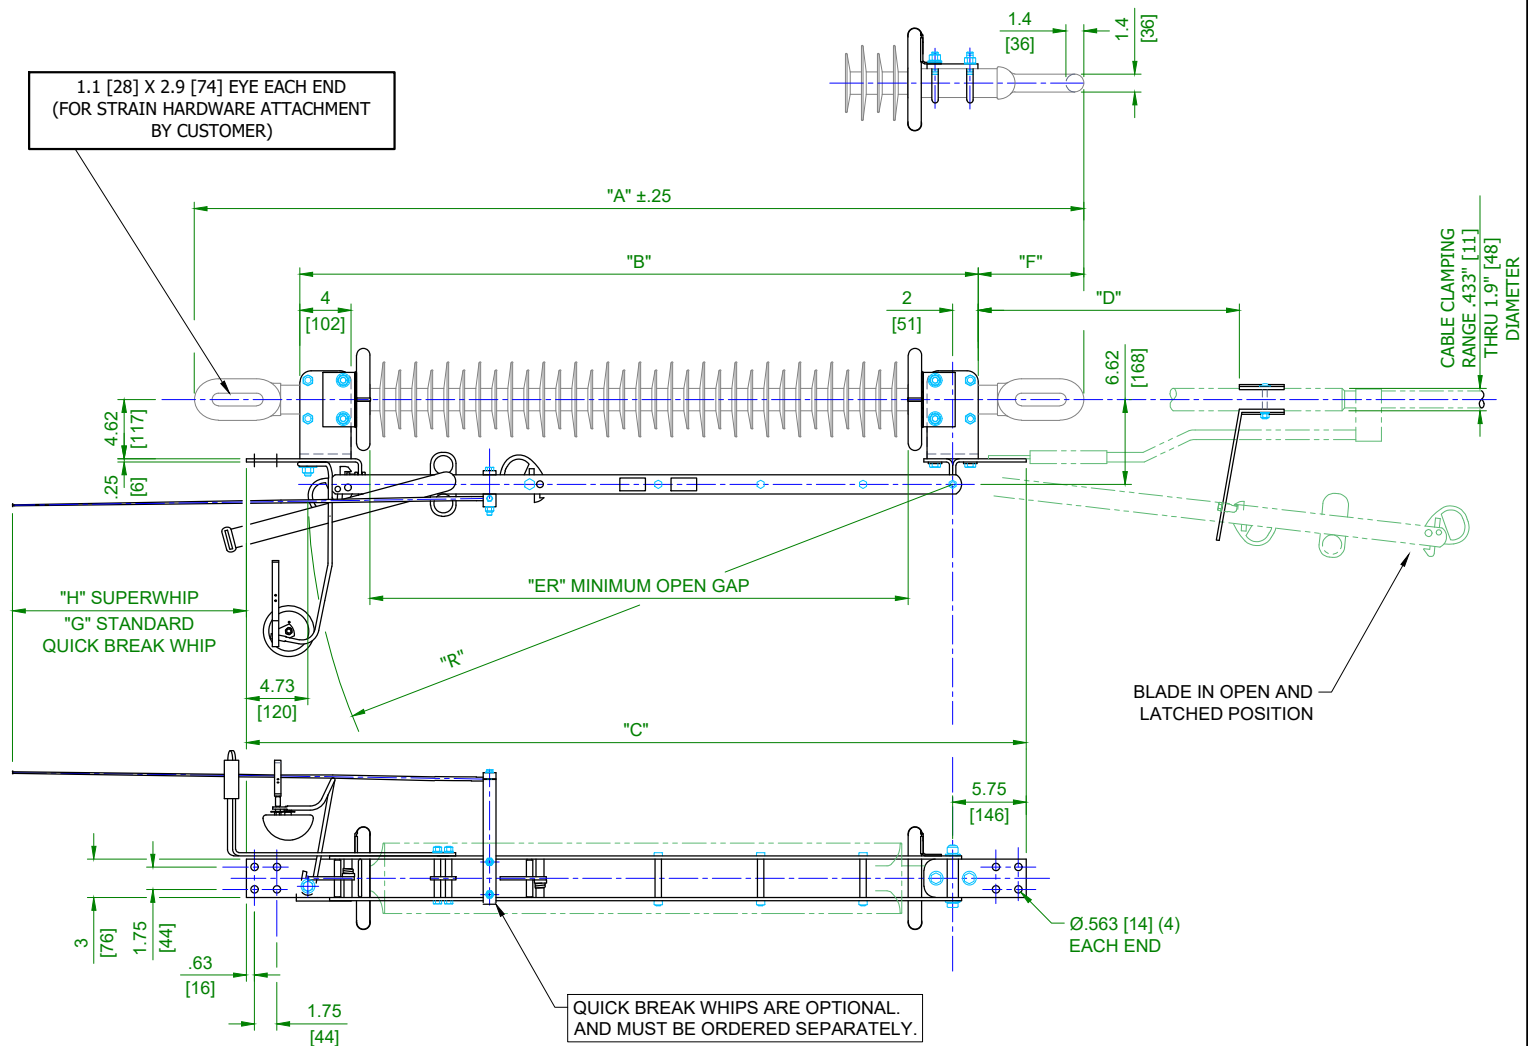

NOTES:

- ALL DIMENSIONS ARE IN INCHES.
DIMENSIONS IN [] ARE IN mm.

DIMENSIONS IN [] ARE IN mm.		SWITCH STYLE REFERENCE NUMBER		REV
		-		K
Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550		DRAWN JPB	DATE 07/18/2008	VERSION 1
ILO-C COPPER IN-LINE DISCONNECT SWITCH HOOKSTICK OPERATED 69 thru 161kV, 1200A, 61kA MOM, NGK INSULATORS		CHECKED LAB	DRAWING NO. C02A520	
		APPROVED		

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550

ILO-C COPPER IN-LINE DISCONNECT SWITCH HOOKSTICK OPERATED
69 thru 161kV, 1200A, 61kA MOM, NGK INSULATORS