


GROUP NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []				WEIGHT/POLE (INCL. INSUL.)	
	kV NOM.	kV MAX.	kV BIL	kA MOM.			"A"	"B"	"C"	"R"	LBS	(Kg)
				3 SEC. SYM RMS	10 CYCLE ASYM RMS							
G01	115	123	550	71	120	286	56.88 [1445]	45 [1143]	58 ³ / ₈ [1483]	50.75 [1289]	300	[136.1]
G02	138	145	650	71	120	288	65.88 [1673]	54 [1372]	71 ³ / ₄ [1822]	59.56 [1513]	448	[203.2]
G03	161	170	750	71	120	291	73.88 [1876]	62 [1575]	69 ¹ / ₄ [1759]	67.44 [1713]	510	[231.3]
G04	230	245	900	71	120	304	91.88 [2333]	80 [2032]	98 ³ / ₈ [2499]	85.25 [2165]	595	[269.9]
G05	230	245	1050	71	120	312	103.88 [2638]	92 [2337]	106 ³ / ₈ [2702]	97.13 [2467]	638	[289.4]

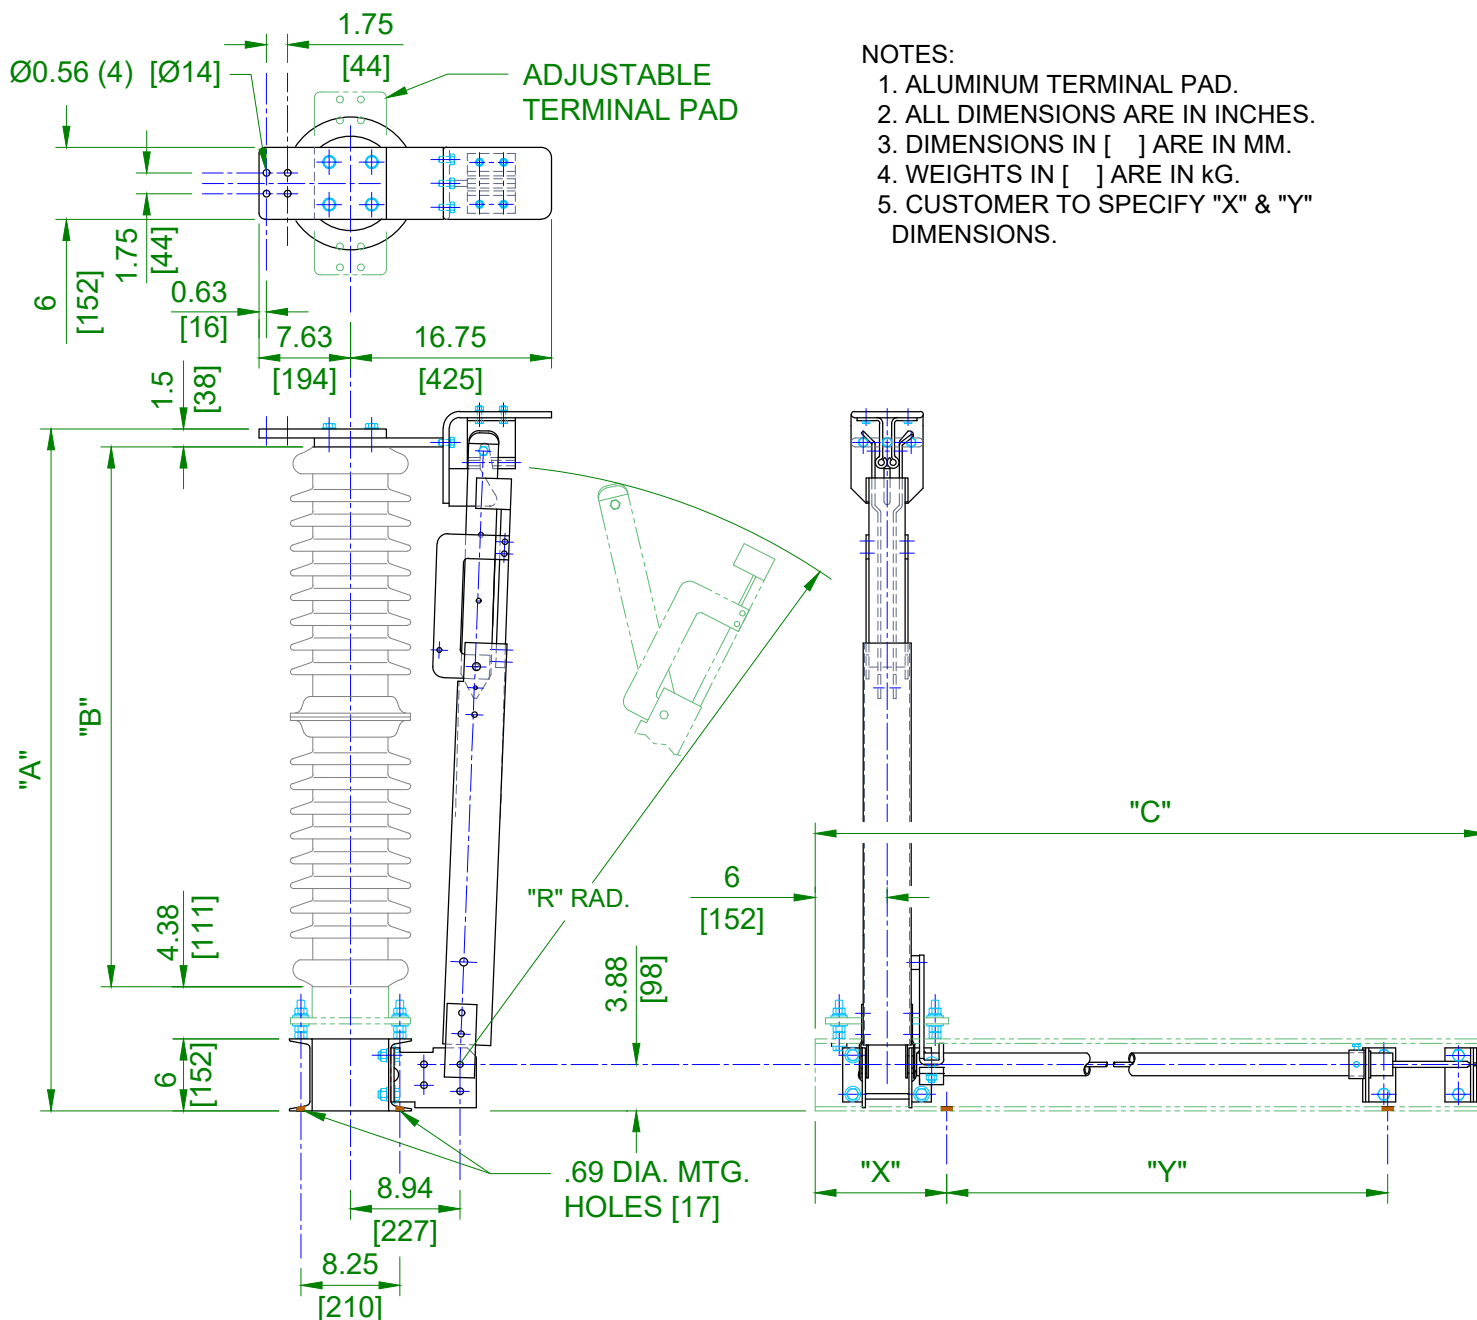

Cleaveland/Price Inc.

REV	VERSION	DRAWN	CHECKED	APPROVED	DATE	SHEET	SCALE
-E	2	GH	SF	-	05/31/1995	1 OF 1	PROPORTIONAL
TYPE GND-A ALUMINUM GROUND SWITCH 115kV-230kV 120kA MOM. / 71kA 3 SEC. RATING; 5" B.C. INSUL.; HORIZONTAL MOUNT							DWG NO. C14A009