GROUP NO.	RATINGS kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.	POST INSUL NEMA TR*	DIMENSIONS IN INCHES *MILLIMETERS SHOWN IN ITALICS* "A"	"A_1"	"B"	"C"	"D"	"E"	"F"	"R"	WEIGHT/POLE (INCL. INSUL.) LBS	KG
G01	7.2	8.3	95	600	40	202	10 *254*	15 *381*	7.50 *191*	25 *635*	15 *381*	7 *178*	10.50 *267*	17 *432*	119	*54.0*
G02				1200	61			15.25 *387*					11 *279*		130	*59.0*
G03				2000	70		10.25 *260*	15.50 *394*					10.75 *273*		156	*70.8*
G04	14.4	15.5	110	600	40	205	12.50 *318*	17.50 *445*	10 *254*	25 *635*	15 *381*	10 *254*	10.50 *267*	17 *432*	135	*61.3*
G05				1200	61			17.75 *451*					11 *279*		146	*66.3*
G06				2000	70		12.75 *324*	18 *457*					10.75 *273*		172	*78.1*
G07	23	27	150	600	40	208	16.50 *419*	21.50 *546*	14 *356*	28 *711*	18 *457*	12 *305*	10.50 *267*	20 *508*	193	*87.6*
G08				1200	61			21.75 *552*					11 *279*		205	*93.1*
G09				2000	70		16.75 *425*	22 *559*					10.75 *273*		232	*105.3*
G10	34.5	38	200	600	40	210	20.50 *521*	25.50 *648*	18 *457*	34 *864*	24 *610*	18 *457*	10.50 *267*	26 *660*	247	*112.1*
G11				1200	61			25.75 *654*					11 *279*		260	*118.0*
G12				2000	70		20.75 *527*	26 *660*					10.75 *273*		292	*132.6*

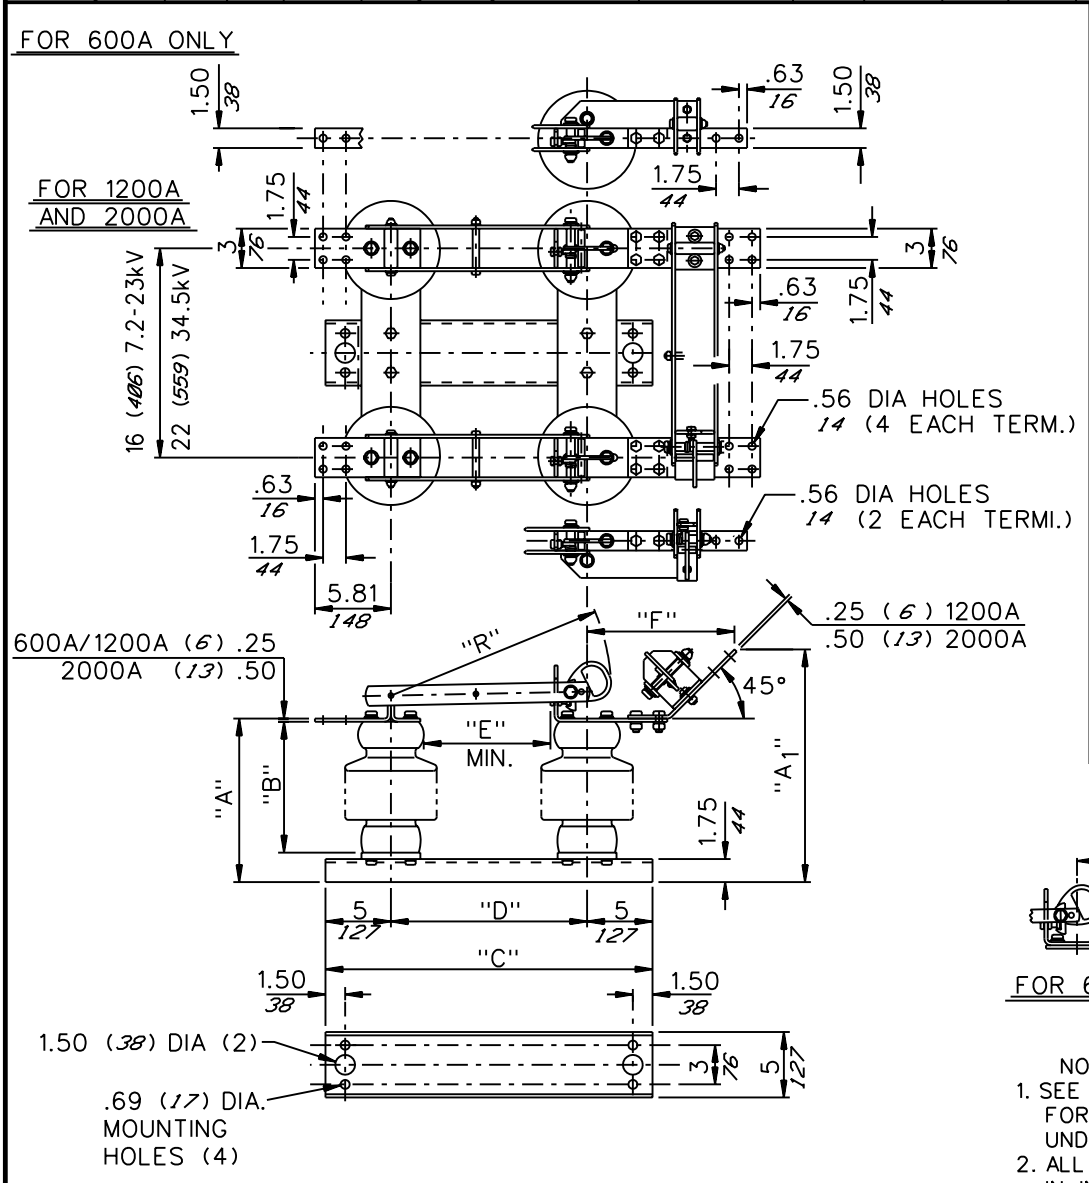

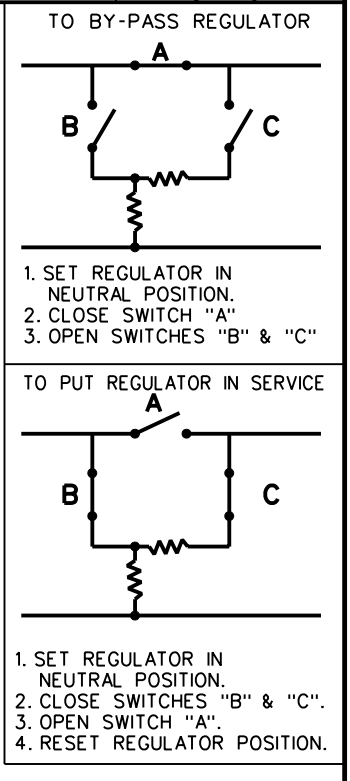



FOR 600A ONLY

NOTES:
1. SEE DRAWING C13A004 FOR HORIZONTAL UNDERHUNG MOUNTING.
2. ALL DIMENSIONS ARE IN INCHES.
3. DIMENSIONS IN *ITALIC* ARE IN *MM*
4. WEIGHTS IN *ITALIC* ARE IN *KG*

FOR VERTICAL MOUNTING ONLY

CODE A 00

Cleaveland / Price Inc. *14000 RT. 993 Trafford, PA 15085-9550*

DATE 11-09-93 REV. D

RBO-C COPPER HOOKSTICK OPERATED BYPASS SWITCH
7.2kV-34.5kV; 600A-2000A; 3" B.C. INSULS; 5" CHANNEL BASE

DRAWN DP CHECKED GØN

DRAWING No. C13A003