GROUP NO.	RATINGS kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.	POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN [ ] "A"	"A1"	"B"	"C"	"D"	"E"	"R"	WEIGHT/POLE (INCL. INSUL.) LBS	kg
G01 G02 G03	7.2	8.3	95	600 1200 2000	40 61 100	202	10.06 [255] 10.31 [262]	10.44 [265] 10.69 [272]	7.50 [191]	26 [660]	16 [406]	7 [178]	17.63 [448]	127 138 154	[57.7] [62.7] [69.9]
G04 G05 G06	14.4	15.5	110	600 1200 2000	40 61 100	205	12.56 [319] 12.81 [325]	12.94 [329] 13.19 [335]	10 [254]	30 [762]	20 [508]	10 [254]	21.63 [549]	139 151 163	[63.1] [68.6] [74.0]
G07 G08 G09	23	27	150	600 1200 2000	40 61 100	208	16.56 [421] 16.81 [427]	16.94 [430] 17.19 [437]	14 [356]	32 [813]	22 [559]	12 [305]	23.63 [600]	189 201 220	[85.8] [91.3] [99.9]
G10 G11 G12	34.5	38	200	600 1200 2000	40 61 100	210	20.56 [522] 20.81 [529]	20.94 [532] 21.19 [538]	18 [457]	40 [1016]	30 [762]	18 [457]	31.63 [803]	240 253 277	[109.0] [114.9] [125.8]
G13	7.2	8.3	95	1600	70	202	10.06 [529]	10.44 [265]	7.50 [191]	26 [660]	16 [406]	7 [178]	17.63 [448]	148	[67.3]
G14	14.4	15.5	110	1600	70	205	12.56 [319]	12.94 [329]	10 [254]	30 [762]	20 [508]	10 [254]	21.63 [549]	159	[72.3]
G15	23	27	150	1600	70	208	16.56 [421]	16.94 [430]	14 [356]	32 [813]	22 [559]	12 [305]	23.63 [600]	213	[96.8]
G16	34.5	38	200	1600	70	210	20.56 [522]	20.94 [532]	18 [457]	40 [1016]	30 [762]	18 [457]	31.63 [803]	267	[121.4]

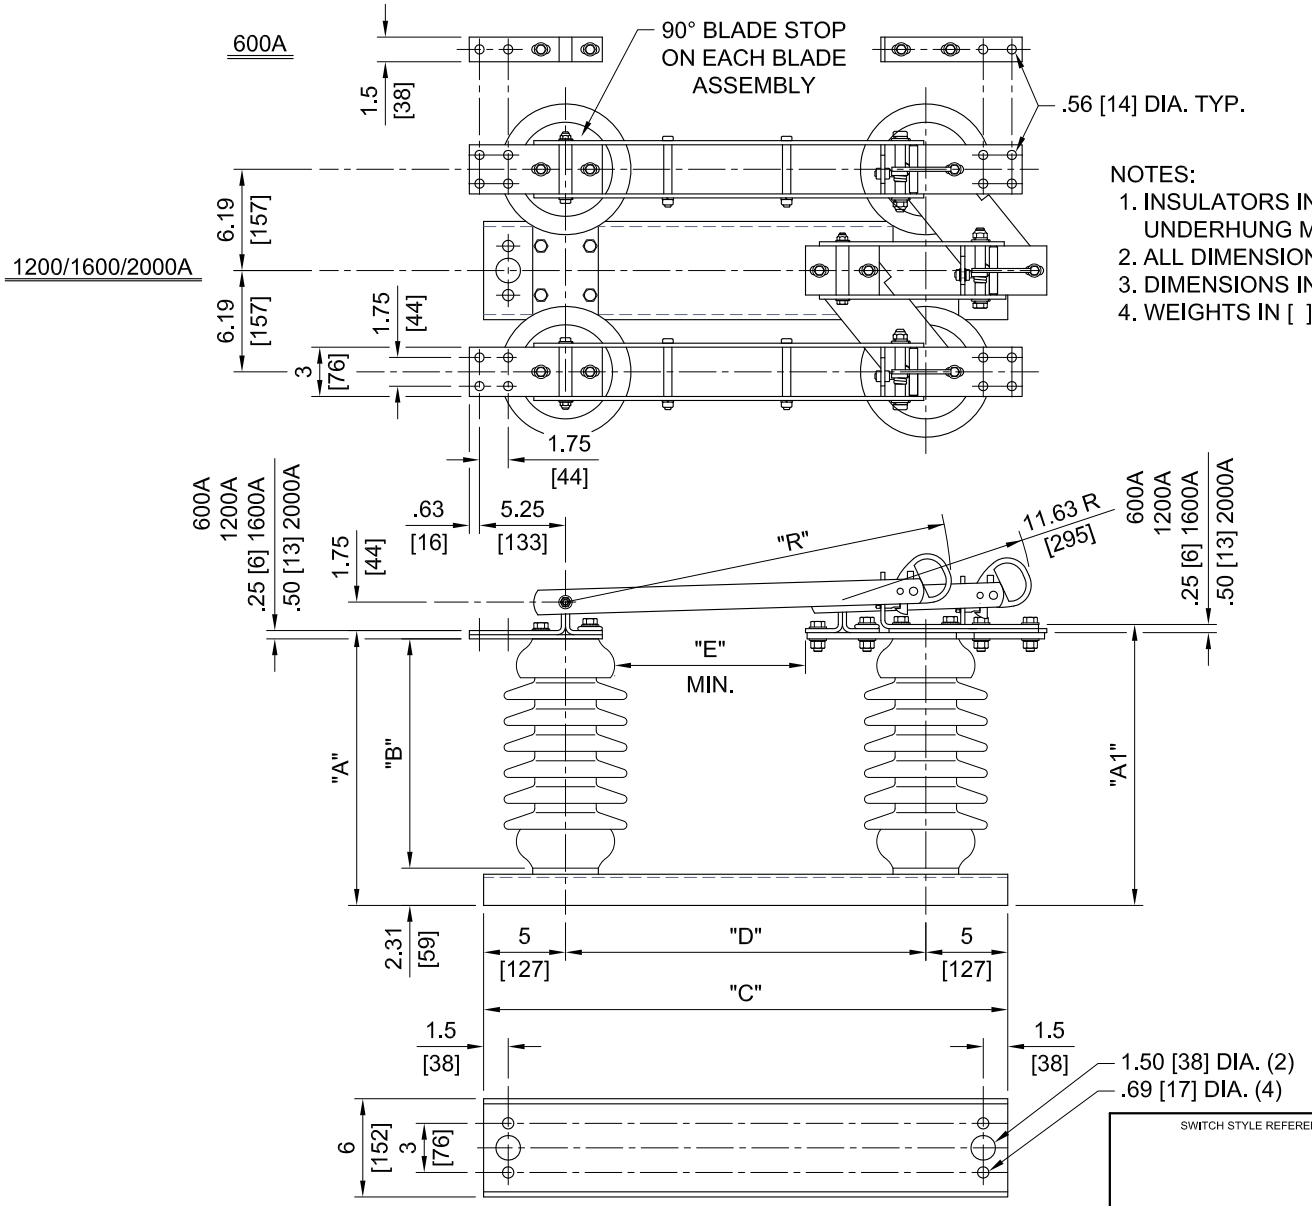

NOTES:
1. INSULATORS INVERTED FOR UNDERHUNG MOUNTING.
2. ALL DIMENSIONS ARE IN INCHES.
3. DIMENSIONS IN [ ] ARE IN mm.
4. WEIGHTS IN [ ] ARE IN kg.

SWITCH STYLE REFERENCE NUMBER	REV
	G

Cleaveland/Price Inc. *14000 Rt. 993 Trafford, PA 15085-9550*

DRAWN	DATE	VERSION
GH	04/01/1992	1

CHECKED	DRAWING NO.
EW	C13A002
APPROVED	

RBI COPPER HOOKSTICK OPERATED BYPASS SWITCH
7.2-34.5kV 600-2000A 3" BC INSULATORS & 6" CHANNEL BASE