GROUP NO.	RATINGS kV NOM.	kV MAX.	kV BIL	AMPS	kA MOM.	POST INSULATOR NEMA TR #	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN [ ] "A"	"A1"	"B"	"C"	"D"	"D1"	"E"	"R"	WEIGHT/POLE (INCLUDING INSUL.) lbs	kg
G01	7.2	8.3	95	600	40	202	9.65 [245]	9.9 [251]	7.5 [191]	45.5 [1156]	15 [381]	20.5 [521]	7 [178]	17.66 [449]	89	[40]
G02				1200	61										100	[45]
G03	14.4	15.5	110	600	40	205	12.15 [309]	12.4 [315]	10 [254]	45.5 [1156]	15 [381]	20.5 [521]	10 [254]	17.66 [449]	107	[49]
G04				1200	61										118	[54]
G05	23	27	150	600	40	208	16.15 [410]	16.4 [417]	14 [356]	51.5 [1308]	18 [457]	23.5 [597]	12 [305]	20.63 [524]	147	[67]
G06				1200	61										155	[70]
G07	34.5	38	200	600	40	210	20.15 [512]	20.4 [518]	18 [457]	63.5 [1613]	24 [610]	29.5 [749]	18 [457]	26.6 [676]	174	[79]
G08				1200	61										180	[82]

NOTES:
1. INSULATORS INVERTED FOR VERTICAL OR UNDERHUNG MOUNTING.
2. ALL DIMENSIONS ARE INCHES.
3. DIMENSIONS IN [ ] ARE IN MILLIMETERS.
4. WEIGHTS IN [ ] ARE IN KILOGRAMS.

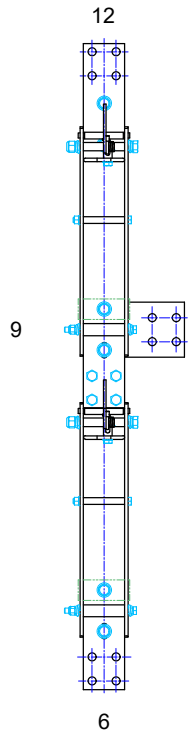

CENTER TERMINAL IS AVAILABLE IN EITHER THE 3 O'CLOCK OR 9 O'CLOCK POSITION. PLEASE SPECIFY WHICH POSITION YOU NEED.

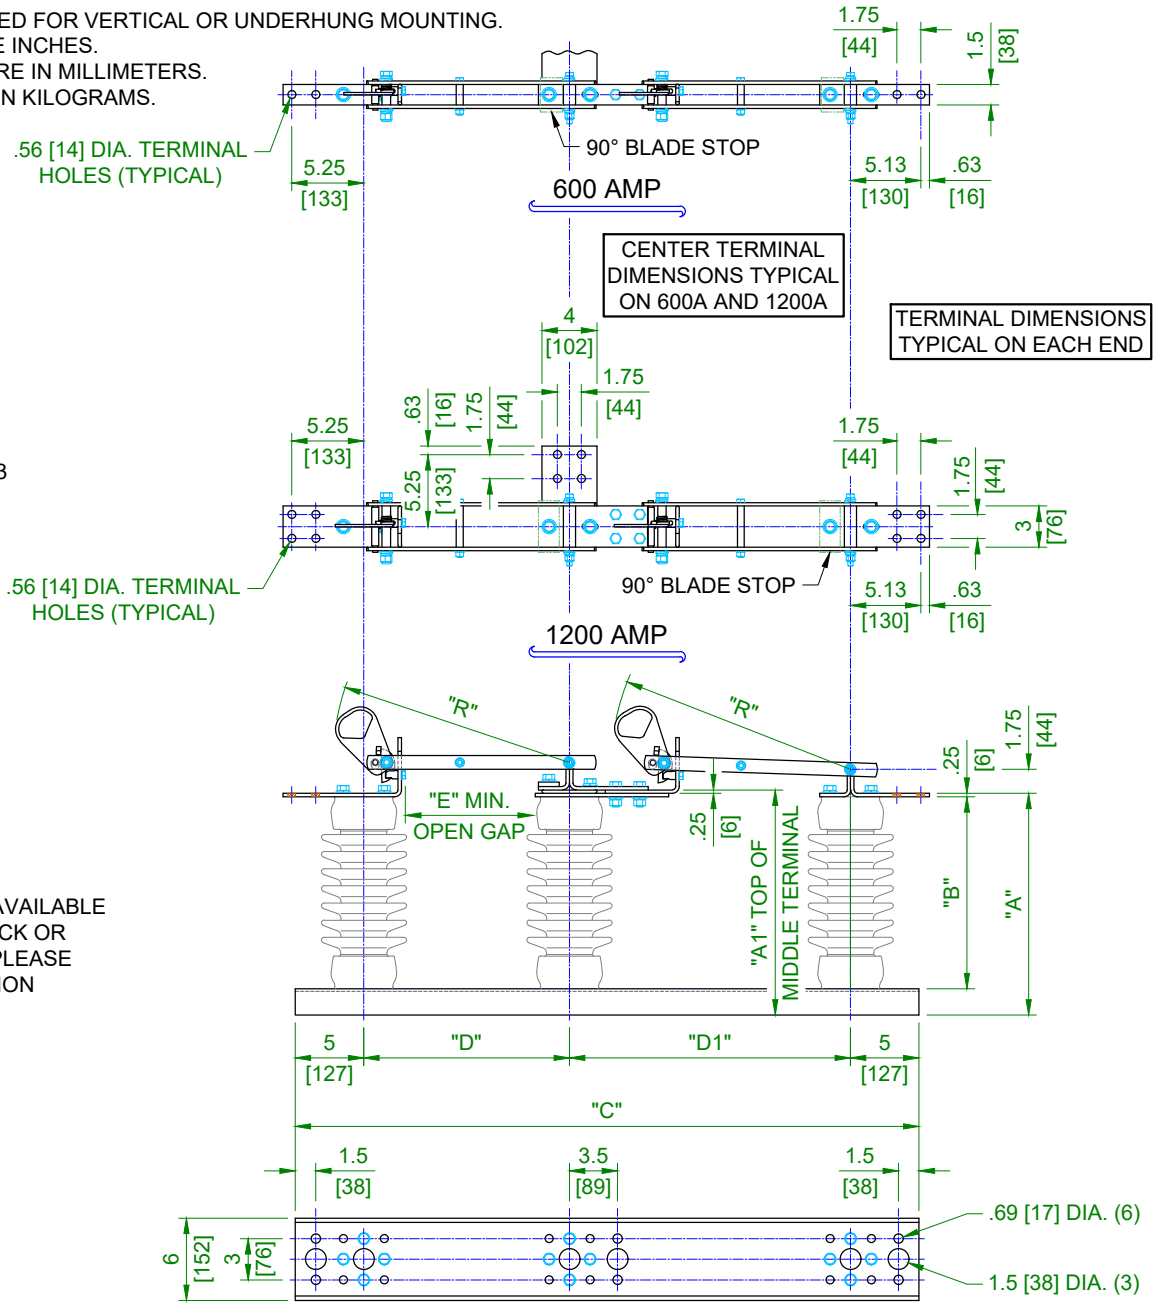

REV	F

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550	DRAWN GH	DATE 09/12/1989	VERSION 3
LCO-CT COPPER TANDEM TRANSFER DISCONNECT SWITCH 7.2-34.5kV; 600-1200A; 3" B.C. INSULATORS AND 6" CHANNEL BASE	CHECKED SF / APPROVED	DRAWING NO. C102A238	