


GROUP NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN ()								WEIGHT/POLE (INCL. INSUL.)	
	KV NOM.	KV MAX.	KV BIL	AMPS	KA MOM.		"A"	"B"	"C"	"D"	"E"	"R ₁ "	"R ₂ "	LBS	Kg	
G001	69	72.5	350	1600	70	278	48.91 (1242)	30.00 (762)	54.00 (1372)	42.00 (1067)	32.00 (813)	27.80 (706)	23.81 (605)	520	(236)	
G002	115	123	550			286	63.91 (1623)	45.00 (1143)	72.00 (1829)	60.00 (1524)	50.00 (1270)	36.80 (935)	32.81 (833)	679	(308)	
G003	138	145	650			288	72.91 (1852)	54.00 (1372)	82.00 (2083)	70.00 (1778)	60.00 (1524)	40.80 (1036)	36.81 (935)	762	(346)	
G004	161	170	750			291	80.91 (2055)	62.00 (1575)	90.00 (2286)	78.00 (1981)	68.00 (1727)	45.80 (1163)	41.81 (1062)	961	(436)	

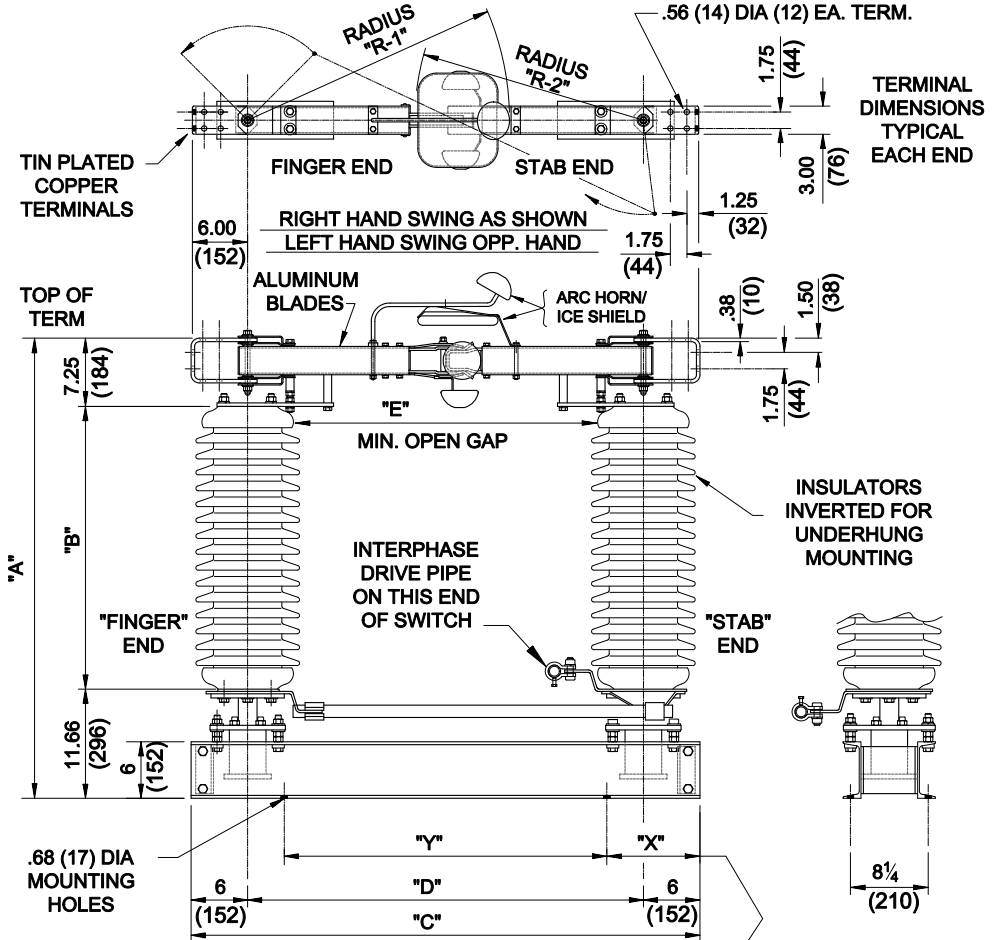

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DIMENSIONS IN () ARE IN mm.
3. WEIGHTS IN () ARE IN KG.

Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550

CB-A ALUMINUM CENTER BREAK DISC. SWITCH
69kV THRU 161kV, 1600A, WITH 5" B.C. INSULATORS

SWITCH STYLE REFERENCE NUMBER		REV
-		E
DRAWN	DATE	VERSION
GH	11/13/2000	2
CHECKED	DRAWING NO.	
SF	C26A029	
APPROVED		