GROUP NO.	RATINGS kV NOM.	kV MAX.	kV BIL	POST INSUL NEMA TR*	DIMENS. IN INCHES MILLIMETERS SHOWN IN () "A"	"B"	"C"	"D"	"R"	WEIGHT/POLE (INCL. INSUL.) LBS	KG
G01	115	123	550	286	57.78 (1468)	45 (1143)	57.75 (1467)	55.31 (1405)	52.50 (1334)	325	147.6
G02	138	145	650	288	66.78 (1696)	54 (1372)	72.50 (1842)	70.06 (1780)	61.38 1559	387	175.9
G03	161	170	750	291	74.78 (1899)	62 (1575)	67 (1702)	64.38 (1635)	69.25 (1759)	513	232.9
G04	230	245	900	304	94.78 (2407)	80 (2032)	84.50 (2146)	82.06 (2084)	87 (2210)	584	265.1
G05	230	245	1050	312	106.78 (2712)	92 (2337)	68.50 (1740)	66.06 (1678)	99 (2515)	633	287.4

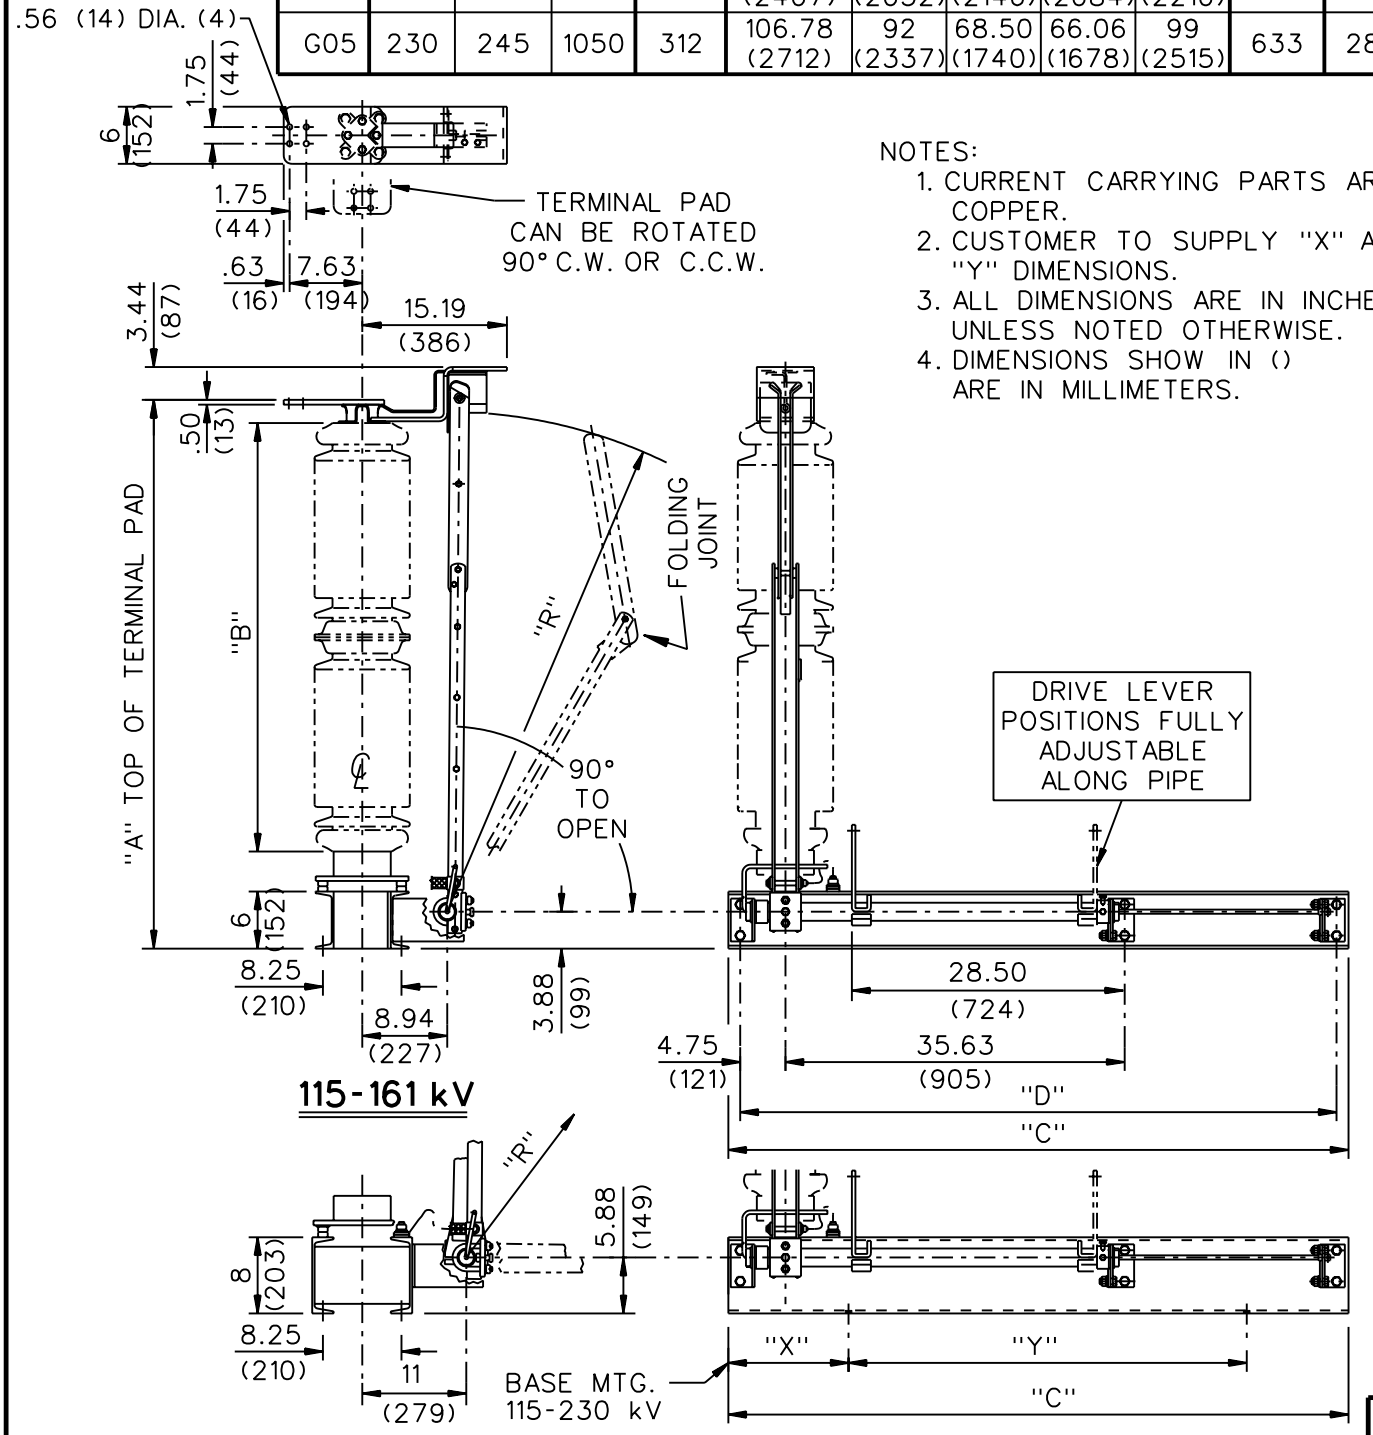

NOTES:
1. CURRENT CARRYING PARTS ARE COPPER.
2. CUSTOMER TO SUPPLY "X" AND "Y" DIMENSIONS.
3. ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE.
4. DIMENSIONS SHOW IN () ARE IN MILLIMETERS.

CODE A 00

Cleaveland / Price Inc. 14000 RT. 993 Trafford, PA 15085-9550

DISTRIB. 001 | DATE 04-01-03 | REV. A

GND-C COPPER HIGH kV GROUND SWITCH OUTLINE
115kV THRU 230kV, 70kA MOMENTARY, HORIZONTAL MOUNTING

DRAWN MD | CHECKED LAØ

DRAWING No. C14A053