


GROUP NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN ITALICS							WEIGHT/POLE (INCL. INSUL.)	
	kV NOM.	kV MAX.	kV BIL	AMPS	KA MOM.		"A"	"B"	"C"	"D"	"E"	"R ₁ "	"R ₂ "	LBS	Kg
G01	69	72.5	350	2000	100	278	48.91 [1242]	30.00 [762]	54.00 [1372]	42.00 [1067]	32.00 [813]	27.80 [706]	23.81 [605]	423	[240]
G02	115	123	550			286	63.91 [1623]	45.00 [1143]	72.00 [1829]	60.00 [1524]	50.00 [1270]	36.80 [935]	32.81 [833]	454	[313]
G03	138	145	650			288	72.91 [1852]	54.00 [1372]	82.00 [2083]	70.00 [1778]	60.00 [1524]	40.80 [1036]	36.81 [935]	608	[351]
G04	161	170	750			291	80.91 [2055]	62.00 [1575]	90.00 [2286]	78.00 [1981]	68.00 [1727]	45.80 [1163]	41.81 [1062]	675	[443]

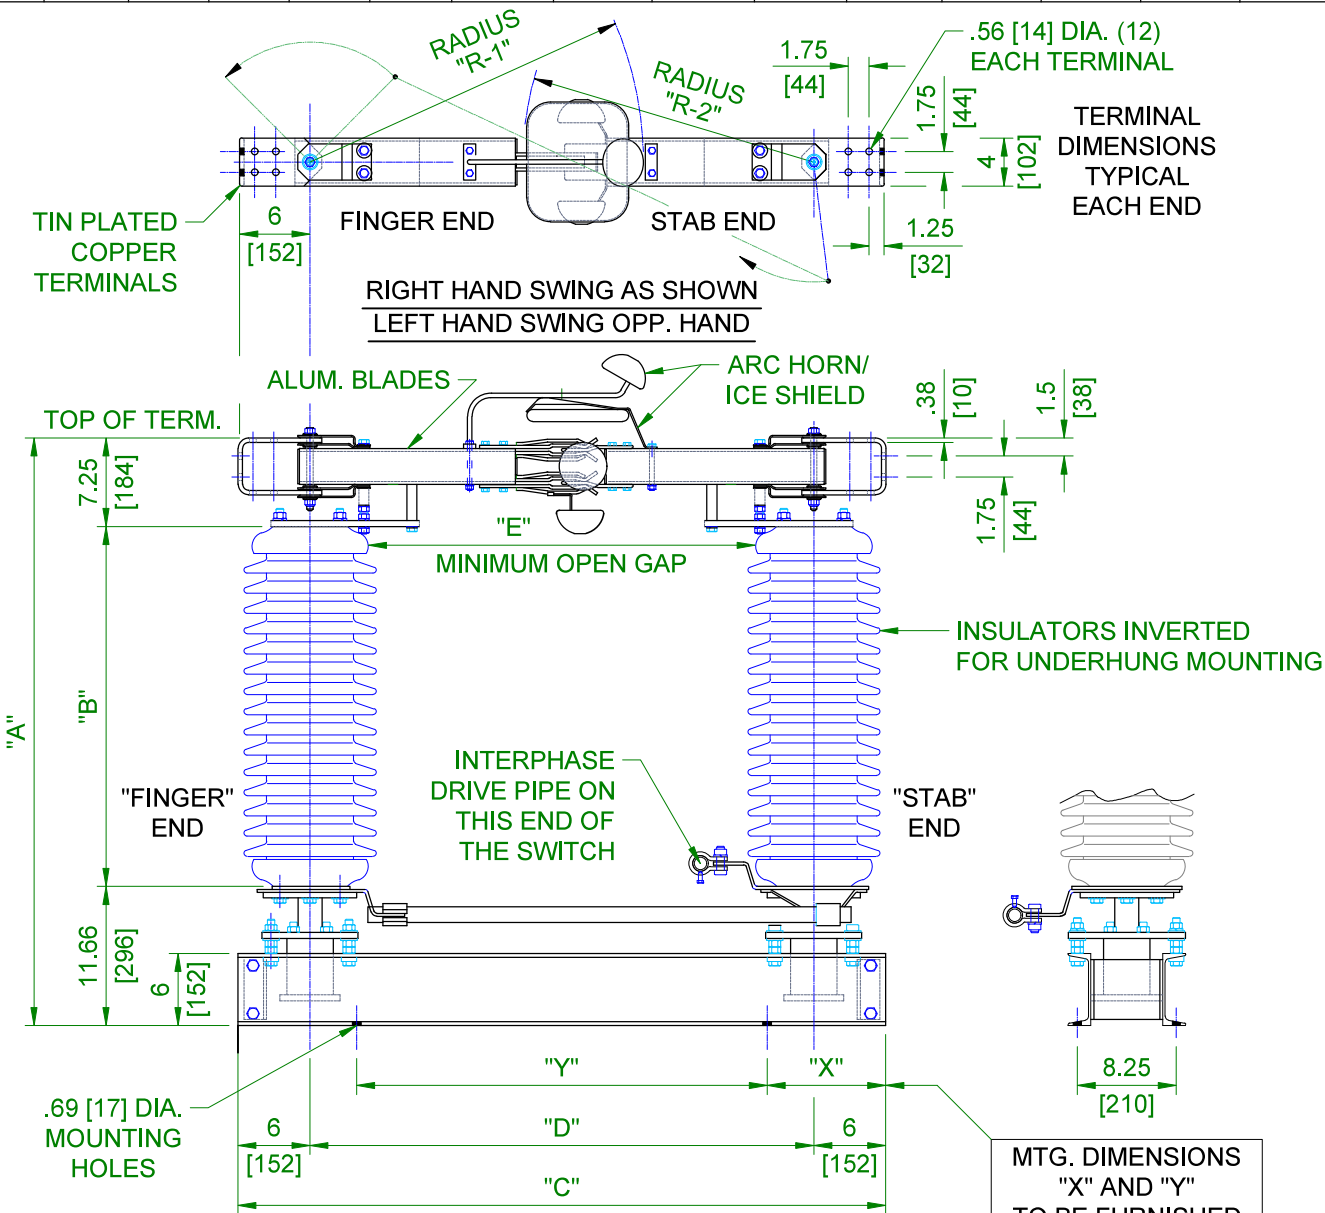

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
 2. DIMENSIONS IN [] ARE IN mm.
 3. WEIGHTS IN [] ARE IN kg.

1. ALL DIMENSIONS ARE IN INCHES. 2. DIMENSIONS IN [] ARE IN mm. 3. WEIGHTS IN [] ARE IN kg.	SWITCH STYLE REFERENCE NUMBER		REV F
Cleaveland/Price Inc. 14000 Rt. 993 Trafford, PA 15085-9550	DRAWN GH	DATE 11/16/2000	VERSION 1
CB-A ALUMINUM CENTER BREAK DISCONNECT SWITCH 69kV THRU 161kV, 2000A, WITH 5" B.C. INSULATORS	CHECKED SF	DRAWING NO. C26A030	
	APPROVED		