



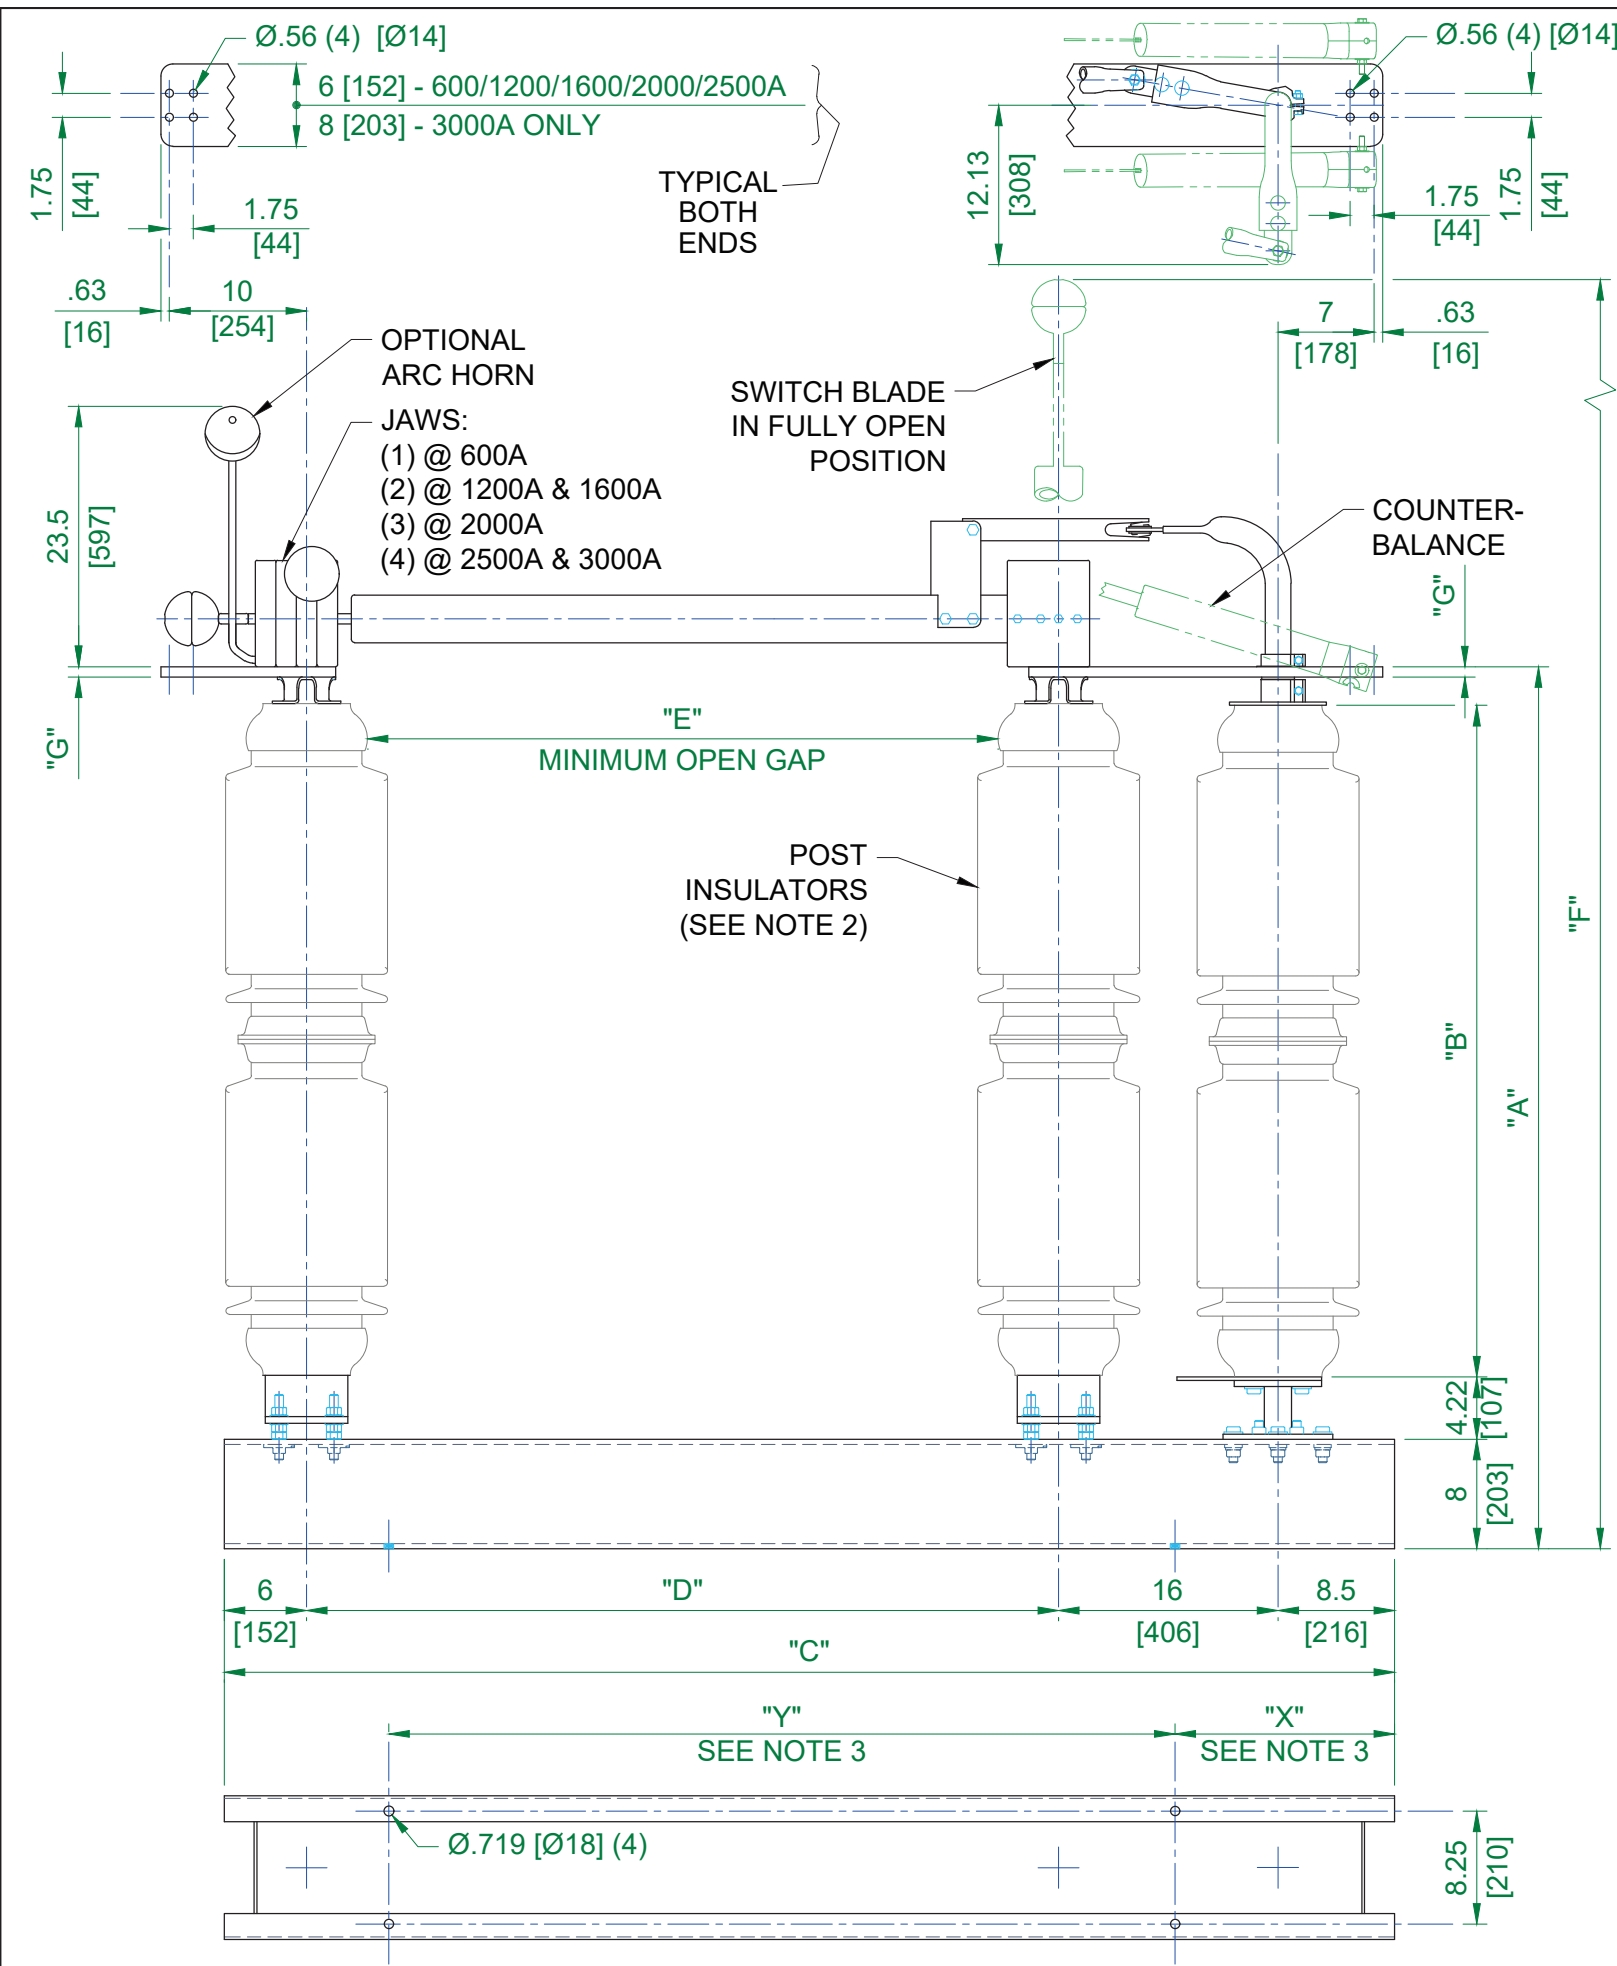

SWITCH STYLE NO.	RATINGS					POST INSUL NEMA TR#	DIMENSIONS IN INCHES MILLIMETERS SHOWN IN []							WEIGHT/POLE (INCL. INSUL.)	
	NOM kV	MAX kV	kV BIL	AMPS	MOM kA		"A"	"B"	"C"	"D"	"E"	"F"	"G"	LBS.	kg
C06B034G01 C06B034G02 C06B034G03	230	245	900	600	40	304	94.78 [2407]	80 [2032]	124.5 [3162]	94 [2388]	84 [2134]	199.41 [5065]	.50 [13]	1522 [692]	[692]
* C06B034G04				2000	100		95.03 [2414]					201.16 [5109]	.75 [19]	1550 [705]	[705]
* C06B034G05 * C06B034G06				2500 3000	100 120		95.28 [2420]					202.91 [5154]	1.0 [25]	1575 [716]	[716]
* C06B034G07 * C06B034G08 * C06B034G09				600 1200 1600	40 61 70		106.78 [2712]					231.65 [5884]	.50 [13]	1725 [784]	[784]
* C06B034G10	230	245	1050	2000	100	312	107.03 [2719]	92 [2337]	144.5 [3670]	114 [2896]	104 [2642]	233.41 [5928]	.75 [19]	1756 [798]	[798]
* C06B034G11 * C06B034G12				2500 3000	100 120		107.28 [2725]					235.16 [5973]	1.0 [25]	1781 [810]	[810]

- NOTES:
- 1. ALUMINUM TERMINAL PADS.
 - 2. INSULATORS INVERTED FOR UNDERHUNG MOUNTING. (SEE NOTE 7)
 - 3. CUSTOMER TO SUPPLY "X" & "Y" DIMENSIONS.
 - 4. ALL DIMENSIONS ARE IN INCHES.
 - 5. DIMENSIONS IN [] ARE IN MILLIMETERS.
 - 6. WEIGHTS IN [] ARE IN KILOGRAMS.
 - 7. SWITCH STYLE NUMBERS SHOWN WITH ☒, ARE NOT AVAILABLE IN UNDERHUNG MOUNTING CONFIGURATION.



REV
H

VERSION
3



Cleaveland/Price Inc.

14000 Route 993 : Trafford, PA 15085

DRAWN MJG	CHECKED GH	APPROVED	DATE 06/14/1996	SHEET 1 OF 1	SCALE PROPORTIONAL
--------------	---------------	----------	--------------------	-----------------	-----------------------

V2-CA ALUMINUM VERTICAL BREAK
DISCONNECT SWITCH 230 kV, 900/1050 BIL, 600-3000
A, 5" B.C. INSULATORS, 8" DOUBLE CHANNEL BASE

DWG NO.
C06B034